




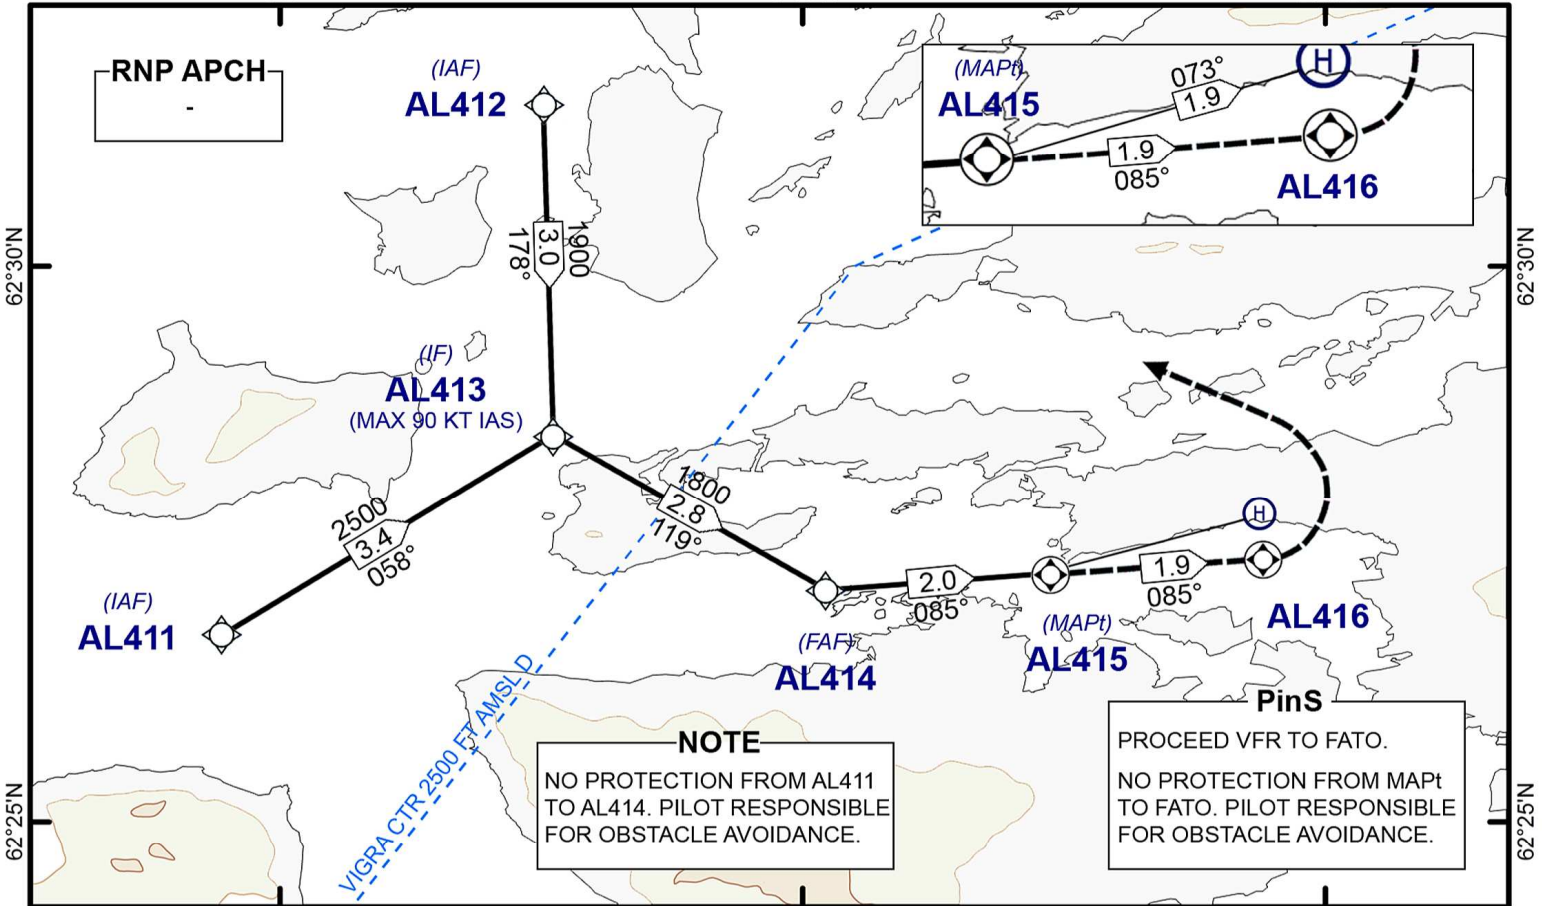

BRIEFING STRIP

FREQ / Ch.: Vigra TWR: 118.105 APP: 129.330 Norway Control: 125.700					FATO ELEVATION 84'
FINAL APCH CRS 085°	MIN Alt. FAF/FAP 1800'	LNAV MDA(H) 410'(326')	LNAV/VNAV DA(H) -	LPV DA(H) -	 MSA NOT AVBL
MISSED APCH: CLIMB STRAIGHT AHEAD TO AL416. TURN LEFT DCT AL412. CLIMBING TO 1900'. START NEW APCH. STATE INTENTIONS TO ATC.					
MAX 90 KT IAS DURING TURN.					
RESTRICTIONS: 1. LTAS APPROVED AIRCRAFT ONLY.					

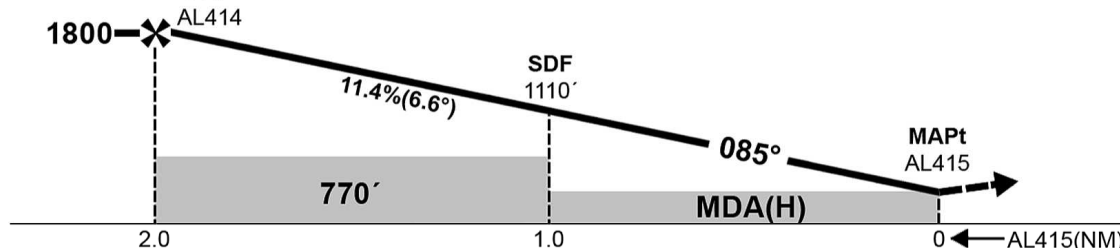

						RECOMMENDED ALTITUDES	
						DIST to MAPt	ALTITUDE
						1 NM	1110'
GND SPEED KT		70	90	100	120	130	 TO AL416
ANGLE: 6.6°		810 FT/MIN	1045 FT/MIN	1160 FT/MIN	1390 FT/MIN	1505 FT/MIN	
LNAV MA climb gradient MNM 6.6%			LNAV MA climb gradient MNM 4.2%		-		CIRCLE-TO-LAND
MDA(H)			MDA(H)		-		MDA(H)
H	410'(326')		720'(636')		-		-
NOTE:							

RECOMMENDED RNAV PROCEDURE CODING

ENAX RNAV(GNSS) 085										
Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
010	IF	AL412	-	-	-0.5	-	-	A1900+	-	-
020	TF	AL413	-	178 (178.5)	-0.5	3.0	-	A1900+	K90-	-
030	TF	AL414	-	119 (119.9)	-0.5	2.8	-	A1800+	-	-
010	IF	AL411	-	-	-0.5	-	-	A2500+	-	-
020	TF	AL413	-	058 (058.6)	-0.5	3.4	-	A2500+	K90-	-
030	TF	AL414	-	119 (119.9)	-0.5	2.8	-	A1800+	-	-
010	IF	AL414	-	-	-0.5	-	-	A1800+	-	-
020	TF	AL415	Y	085 (085.8)	-0.5	2.0	-	A410	-	-6.6
030	TF	AL416	Y	085 (085.9)	-0.5	1.9	-	-	K90-	-
040	DF	AL412	-	-	-0.5	-	L	A1900+	K90-	-

Note: Recommended RNAV procedure coding is based on ARINC 424-15 and is provided solely to indicate which procedure design protection areas were used in the Instrument Flight Procedure Design process.

Waypoint coordinates:

Waypoint identifier	Latitude	Longitude
AL411	62°26'40.800"N	005°58'53.400"E
AL412	62°31'27.536"N	006°05'03.112"E
AL413	62°28'28.139"N	006°05'13.448"E
AL414	62°27'04.516"N	006°10'26.911"E
AL415	62°27'13.139"N	006°14'44.560"E
AL416	62°27'21.208"N	006°18'49.364"E

FIRST LEG OF MISSED APCH

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	MAG VAR	DIST (NM)	Turn Dir	ALT (FT)	Speed (KT)	VPA/TCH
030	TF	AL416	Y	085 (085.9)	-0.5	1.9	-	-	K90-	-