

AERODROME CHART

ICAO

ARP 614948N 0060621E
AD ELEV 196

**SANDANE, ANDA
NORWAY**

NOTES - REMARKS

- APCH LGT RWY 08: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR AT 120 M. FLASHING WHITE LGT AT CENTRE OF XBAR. INNERMOST LGT 30 M FM THR
AND FLUSH WITH SURFACE. BALKED LDG GUIDANCE LGT 275 M AFTER THR.
- DUAL PLASI RWY 08: VISIBLE IN SECTOR 256°-296°. APPROVED MAX DME 1,6 AD.
- APCH LGT RWY 26: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR AT 90 M. FLASHING WHITE LGT AT CENTRE OF XBAR. APCH LGT TURNED HORIZONTALLY
10° N OF RCL. INNERMOST LGT 60 AND 30 M FM THR, FLUSH WITH SURFACE. BALKED LDG
GUIDANCE LGT 275 M AFTER THR.
- DUAL PLASI RWY 26: VISIBLE IN SECTOR 044°-084°. APPROVED MAX DME 1.5 AD N QDM 233 AD
AND MAX DME 0.8 S QDM 260 AD.


Runway strength, REF AD 2.12
Apron surface and strength, REF AD 2.8
Taxiway width, surface and strength, REF AD 2.8
Declared distances, REF AD 2.13

RUNWAY

RWY	BRG
08	082.61
26	262.62

COM

AFIS	119.800 MHZ
------	-------------

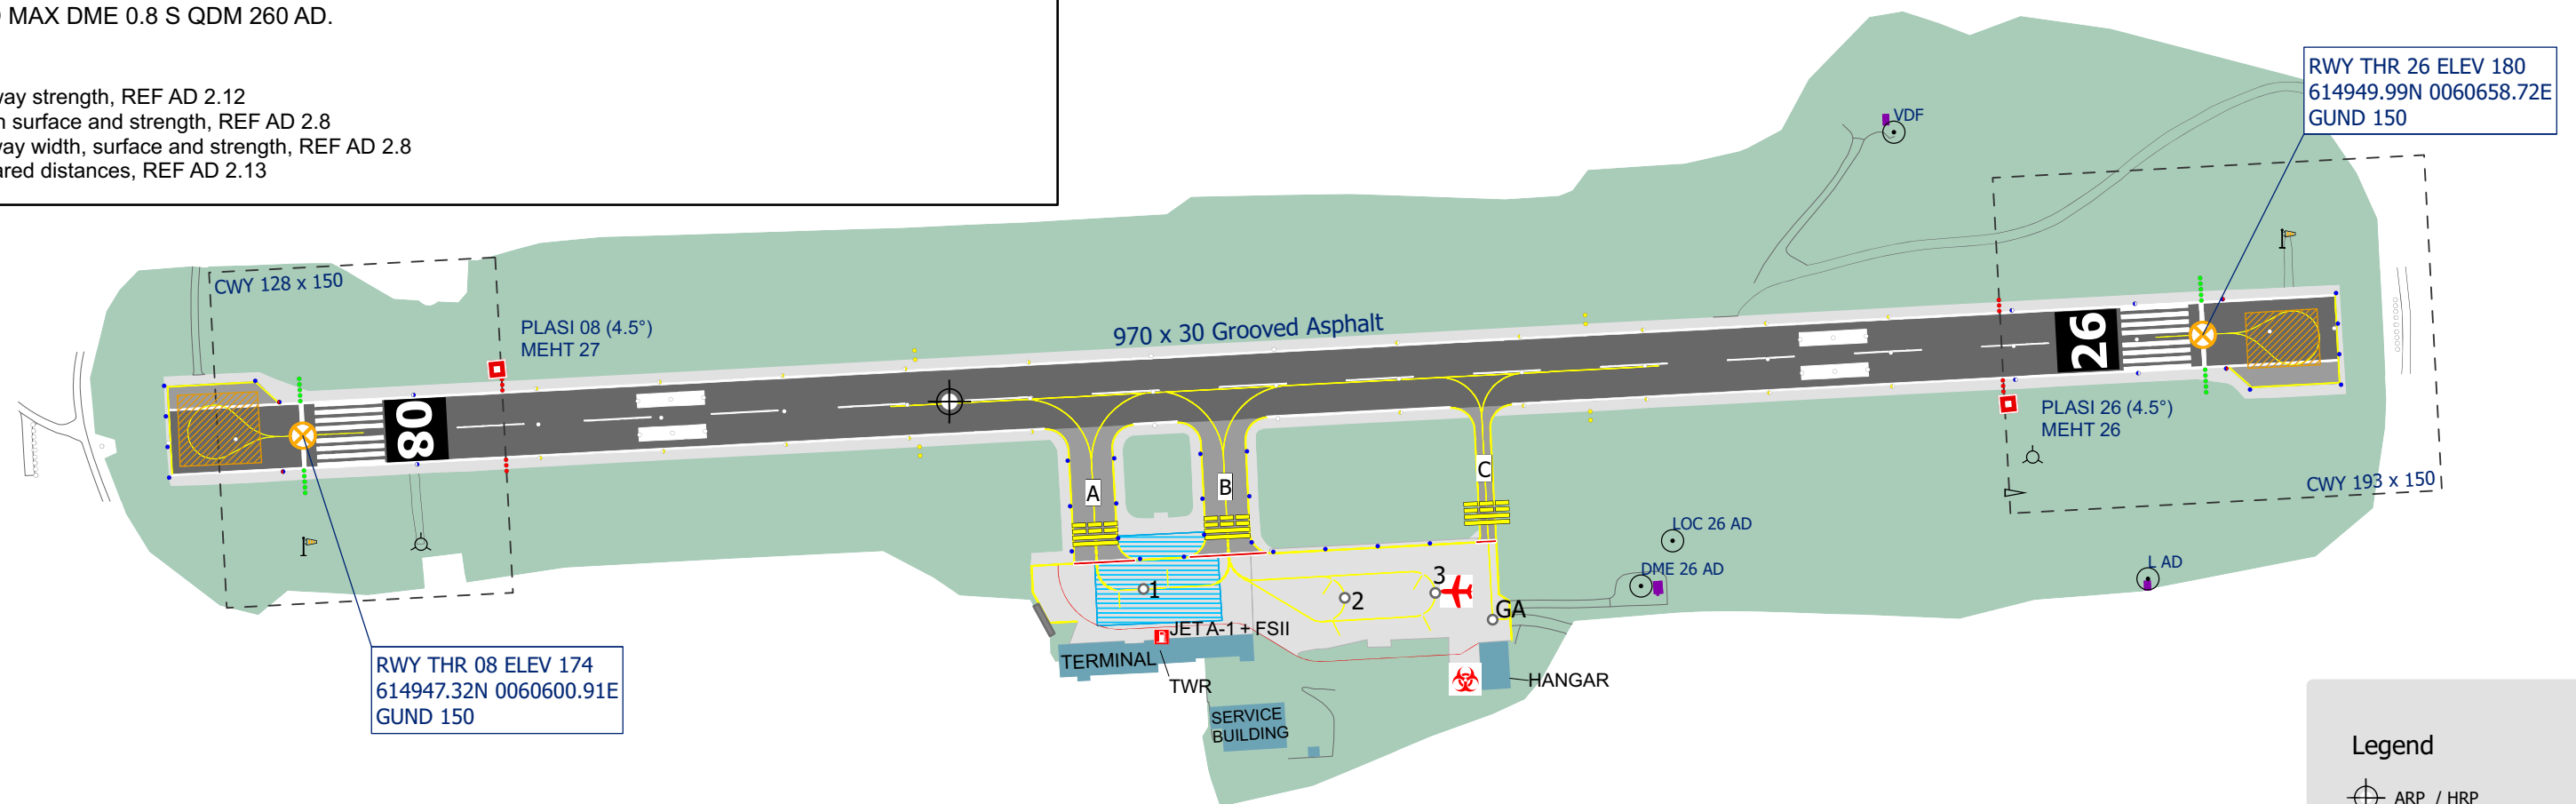


Legend

- | | |
|--|---|
| | ARP / HRP |
| | Windsock |
| | RVR |
| | Anemometer |
| | Instrument navaids |
| | No entry |
| | Manoeuvring Area Boundary |
| | Construction area |
| | Parking/docking chart extent |
| | Fire drill area |
| | Engine Testing Area |
| | Non accessible area |
| | De-Ice |
| | Storage of dangerous goods |
| | Parking for aircraft carrying dangerous goods |

CHANGES: FUEL TYPE.

SCALE: 1:3 000



Dimensions in meter, elevation in feet, bearings are magnetic.

VAR 2° E 2020
Annual change 0.23° E