

AERODROME CHART

ICAO

ARP 624441N 0071545E

AD ELEV 10

MOLDE, ÅRØ

NORWAY

NOTES - REMARKS

- APCH RWY 07: INNERMOST LGT 30 M FM THR. SFL ON CL, XBAR AT 150 AND 300 M FM THR.

- APCH RWY 25: INNERMOST LGT 60 M FM THR. SFL ON CL, XBAR AT 150 AND 300 M FM THR. YELLOW CIRCLING GUIDANCE LGT S AND SE OF AD.

- PAPI RWY 25: OBST PENETRATES CLEARANCE SURFACE ON NORTH SIDE OF CENTRE LINE. NOT TO BE USED NORTH OF EXTENDED CENTRE LINE OUTSIDE 2.4 DME ME.

Runway strength, REF AD 2.12

Apron surface and strength, REF AD 2.8

Taxiway width, surface and strength, REF AD 2.8

Declared distances, REF AD 2.13

COM

AFIS

119.950 MHZ

ATIS

130.075 MHZ

RUNWAY


RWY BRG

07

068.68

25

248.72

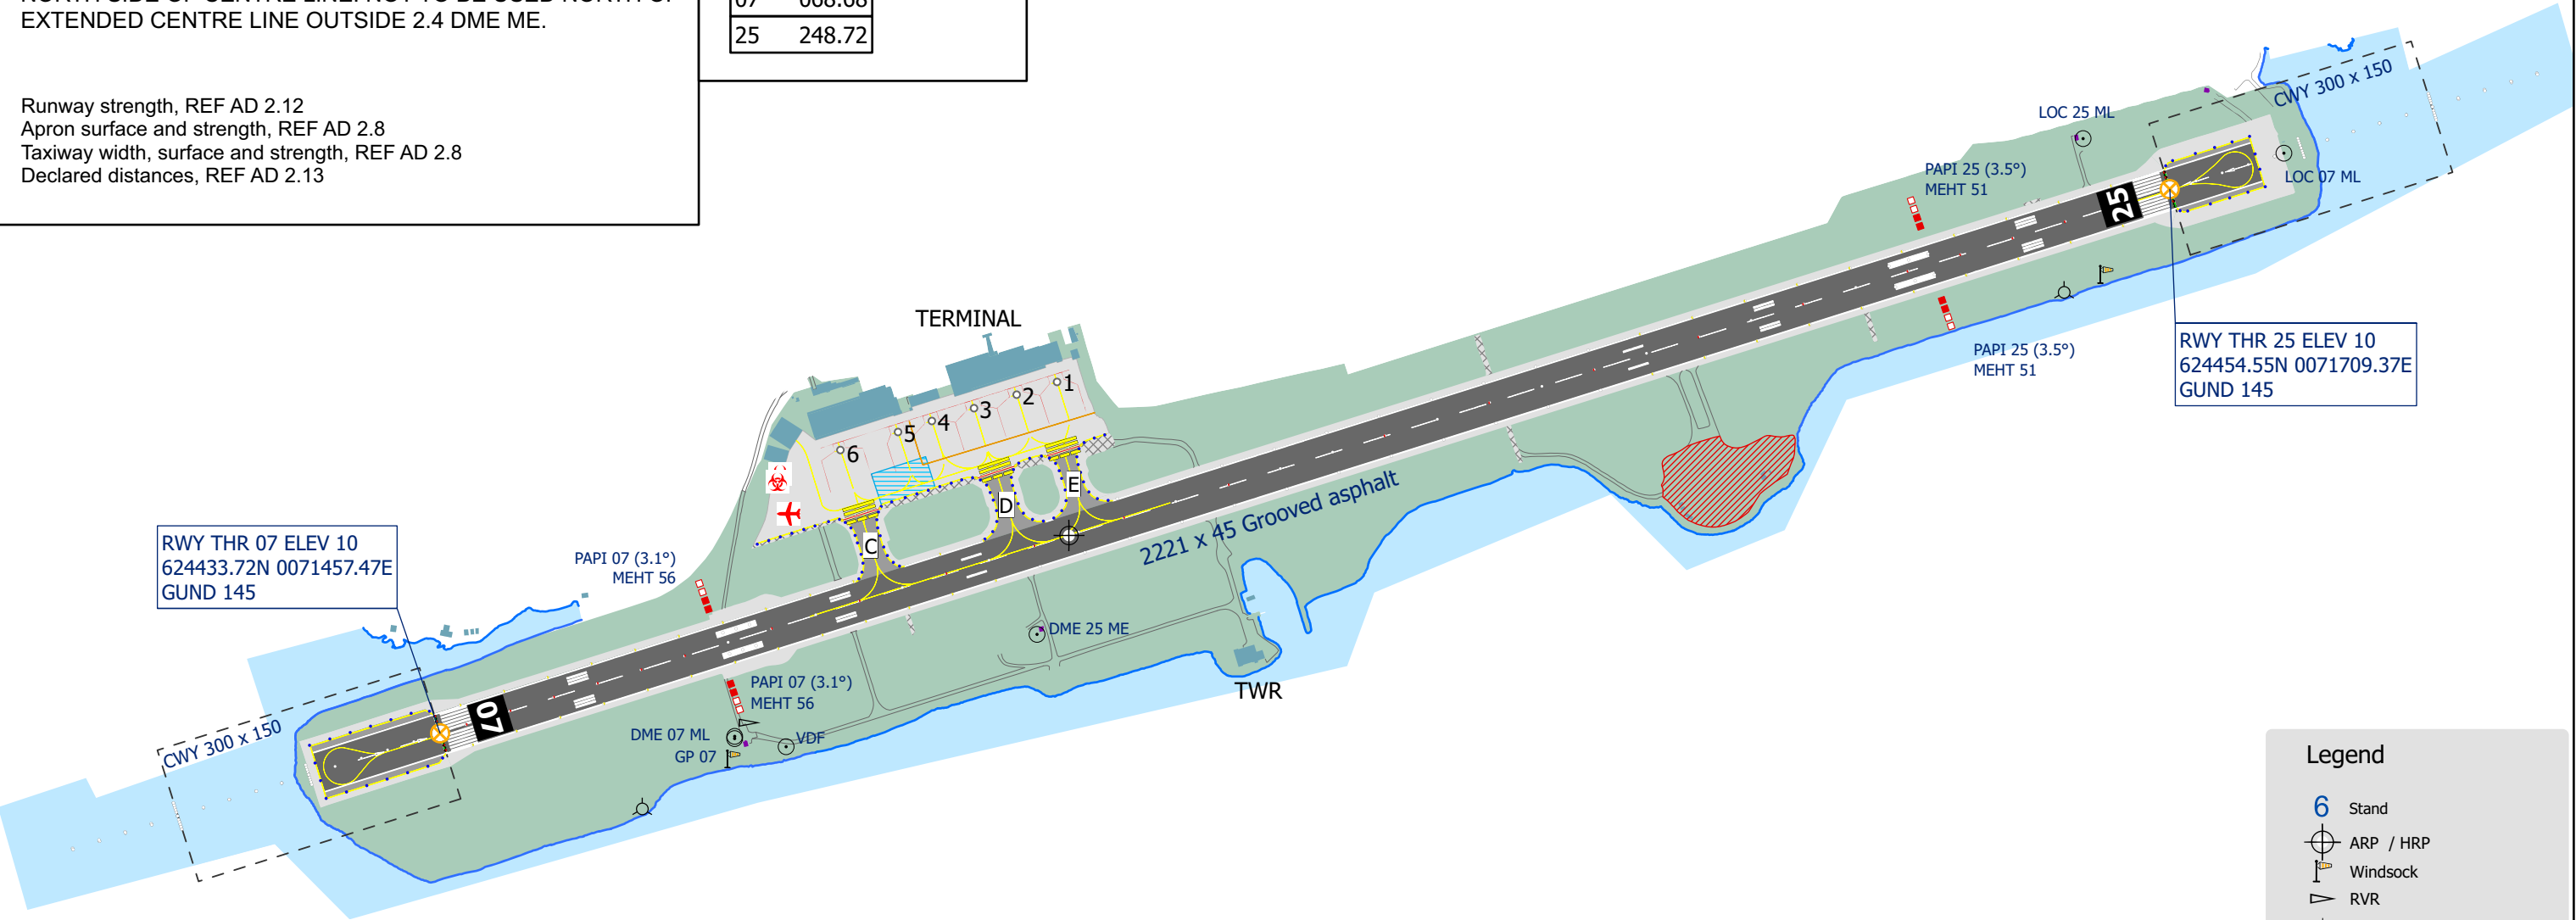

CHANGES: RWY END LGT, NEW POSITION STAND 6, EDITORIALS.