


AERODROME CHART ICAO	ARP 642820N 0113443E AD ELEV 8	NAMSOS, NAMSOS NORWAY
---------------------------------------	---	--

NOTES - REMARKS - APCH RWY 07: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1. XBAR AT 300 AND 150 M. FLASHING WHITE LGT ON CENTRE OF OUTER XBAR. BALKED LDG GUIDANCE LGT LOCATED 280 M AFTER THR. - APCH RWY 25: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1. XBAR AT 150 M. FLASHING WHITE LGT AT 180 M. SEQUENCED FLASHING LGT FM 4980 TO 1320 M FM THR. NOTE: THE FOURTH GROUP OF THESE LIGHTS IS LOCATED OFFSET 60 M TO THE SOUTH OF THE EXTENDED RWY CL. BALKED LDG GUIDANCE LGT LOCATED 280 M AFTER THR. Runway strength, REF AD 2.12 Apron surface and strength, REF AD 2.8 Taxiway width, surface and strength, REF AD 2.8 Declared distances, REF AD 2.13	COM AFIS 119.905 MHZ ATIS 133.205 MHZ RUNWAY <table><tr><th>RWY</th><th>BRG</th></tr><tr><td>07</td><td>070.04</td></tr><tr><td>25</td><td>250.06</td></tr></table>	RWY	BRG	07	070.04	25	250.06
RWY	BRG						
07	070.04						
25	250.06						

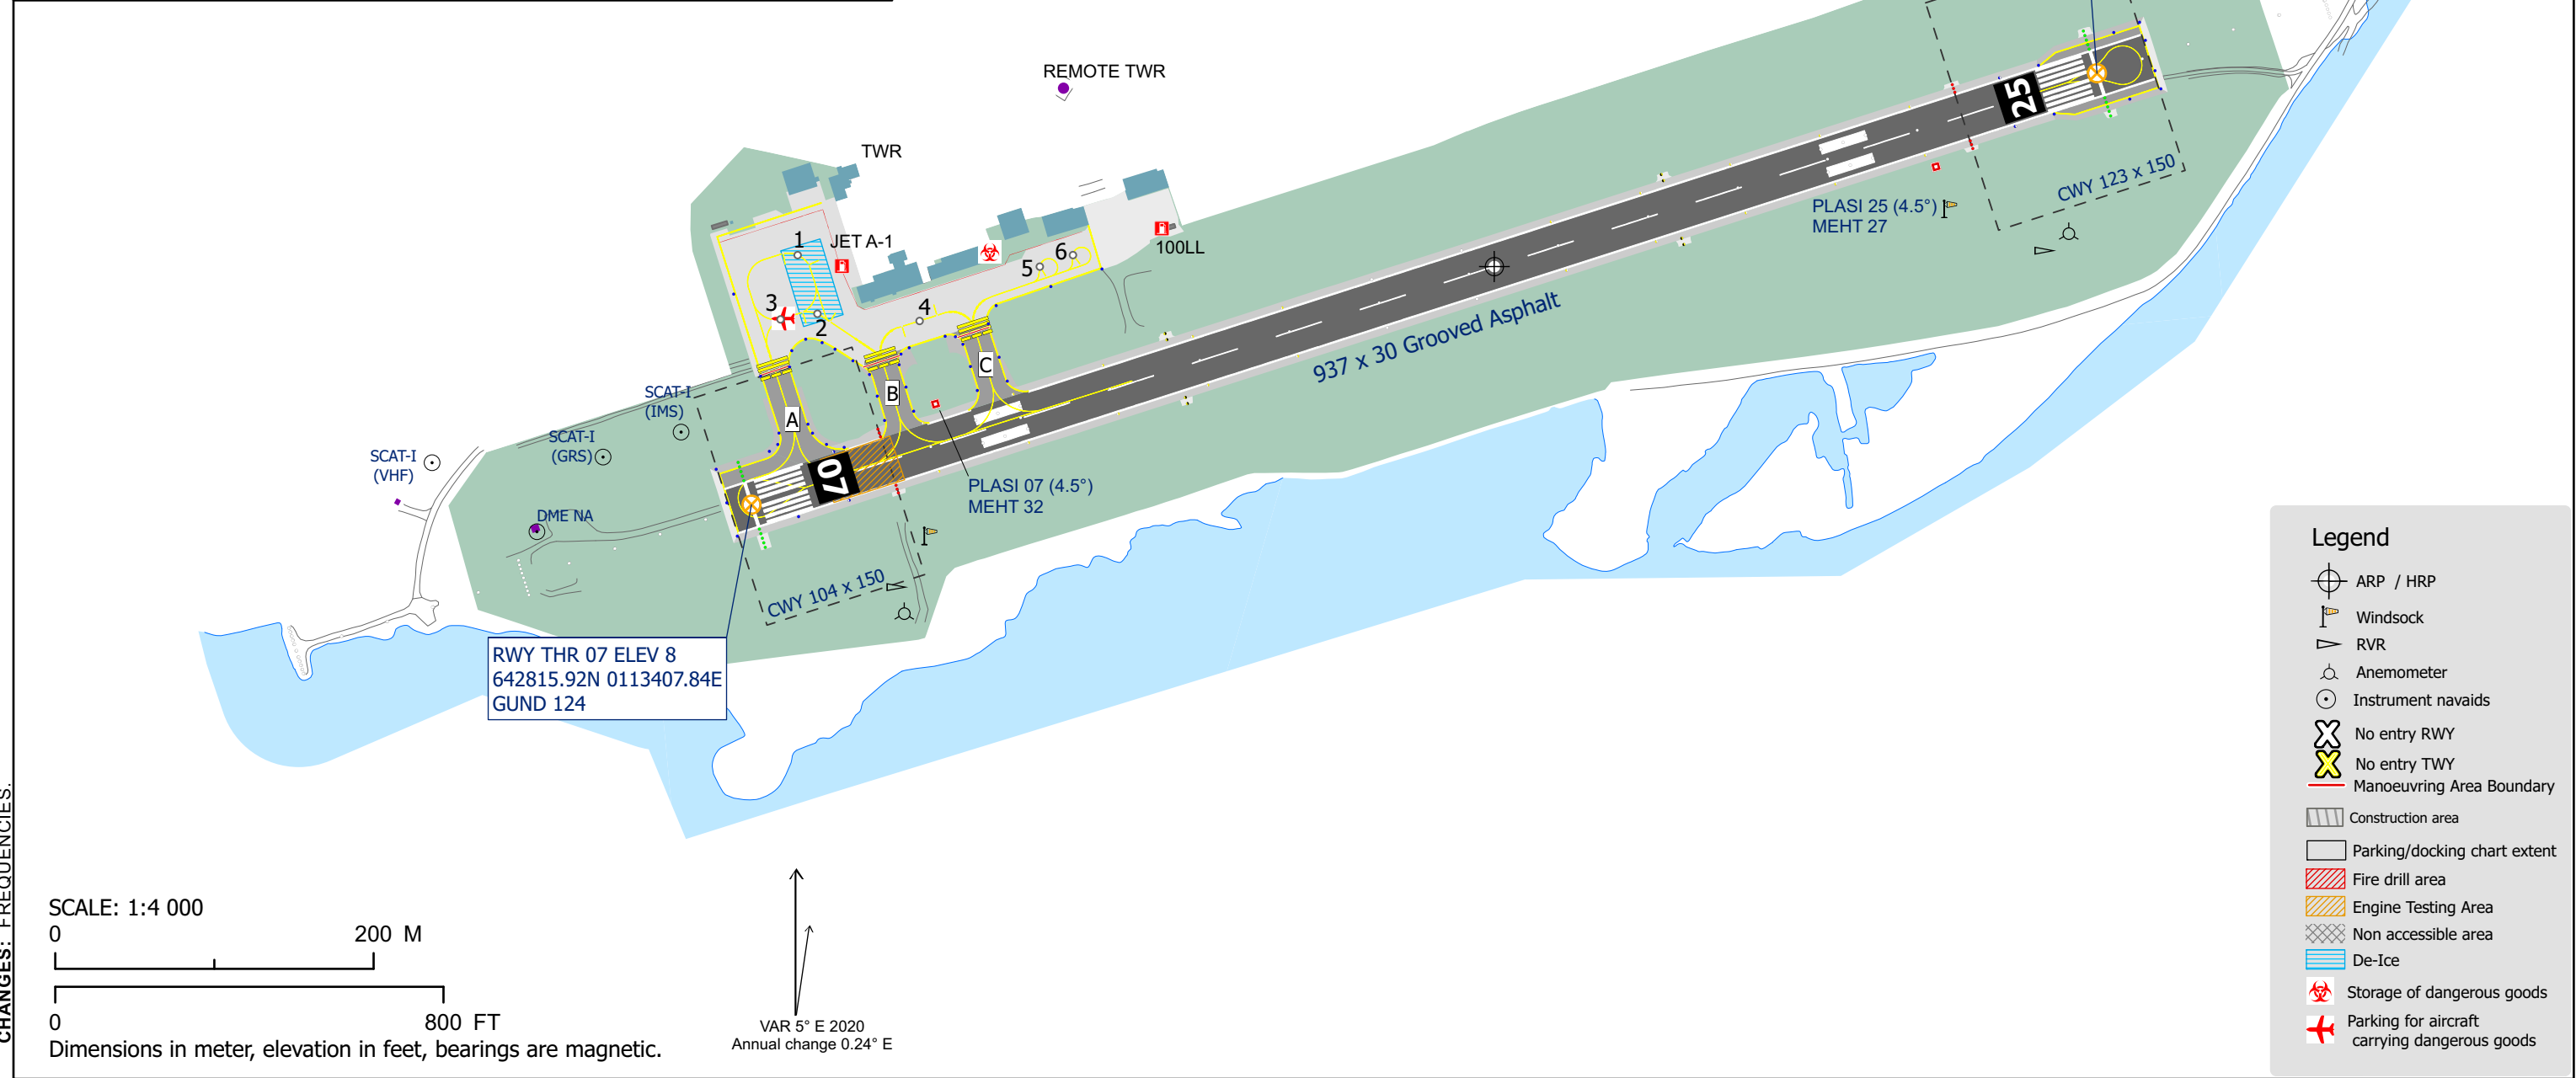

CHANGES: FREQUENCIES.