

AERODROME CHART

ICAO

ARP 610922N 0070816E
AD ELEV 1633

**SOGNDAL, HAUKÅSEN
NORWAY**

NOTES - REMARKS

- APCH LGT 06: XBAR AT 300 AND 150 M FM THR.
INNERMOST LGT, 30 M FM THR, FLUSH WITH SURFACE.
8 SEQUENCED FLG LGT FM 1740 TO 480 M FM THR.
3 WHITE LEAD-IN LGT WEST OF RWY 06, DISTANCE
FROM THR 425, 926 AND 1415 M. LED. 5 CIRCLING LGT S OF
AD (REF AD 2 ENSG 2-1 AND 6-1). LED. BALKED LDG
GUIDANCE LGT 295 M AFTER THR.

- APCH LGT 24: XBAR AT 300 AND 150 M FM THR.
INNERMOST 4 LIGHTS FLUSH WITH SURFACE. FLG
WHITE LGT AT CENTRE ON OUTER XBAR. BALKED LDG
GUIDANCE LGT 310 M AFTER THR.


Runway strength, REF AD 2.12
Apron surface and strength, REF AD 2.8
Taxiway width, surface and strength, REF AD 2.8
Declared distances, REF AD 2.13

COM

AFIS	119.305 MHZ
ATIS	131.255 MHZ

RUNWAY

RWY	BRG
06	057.0
24	237.1

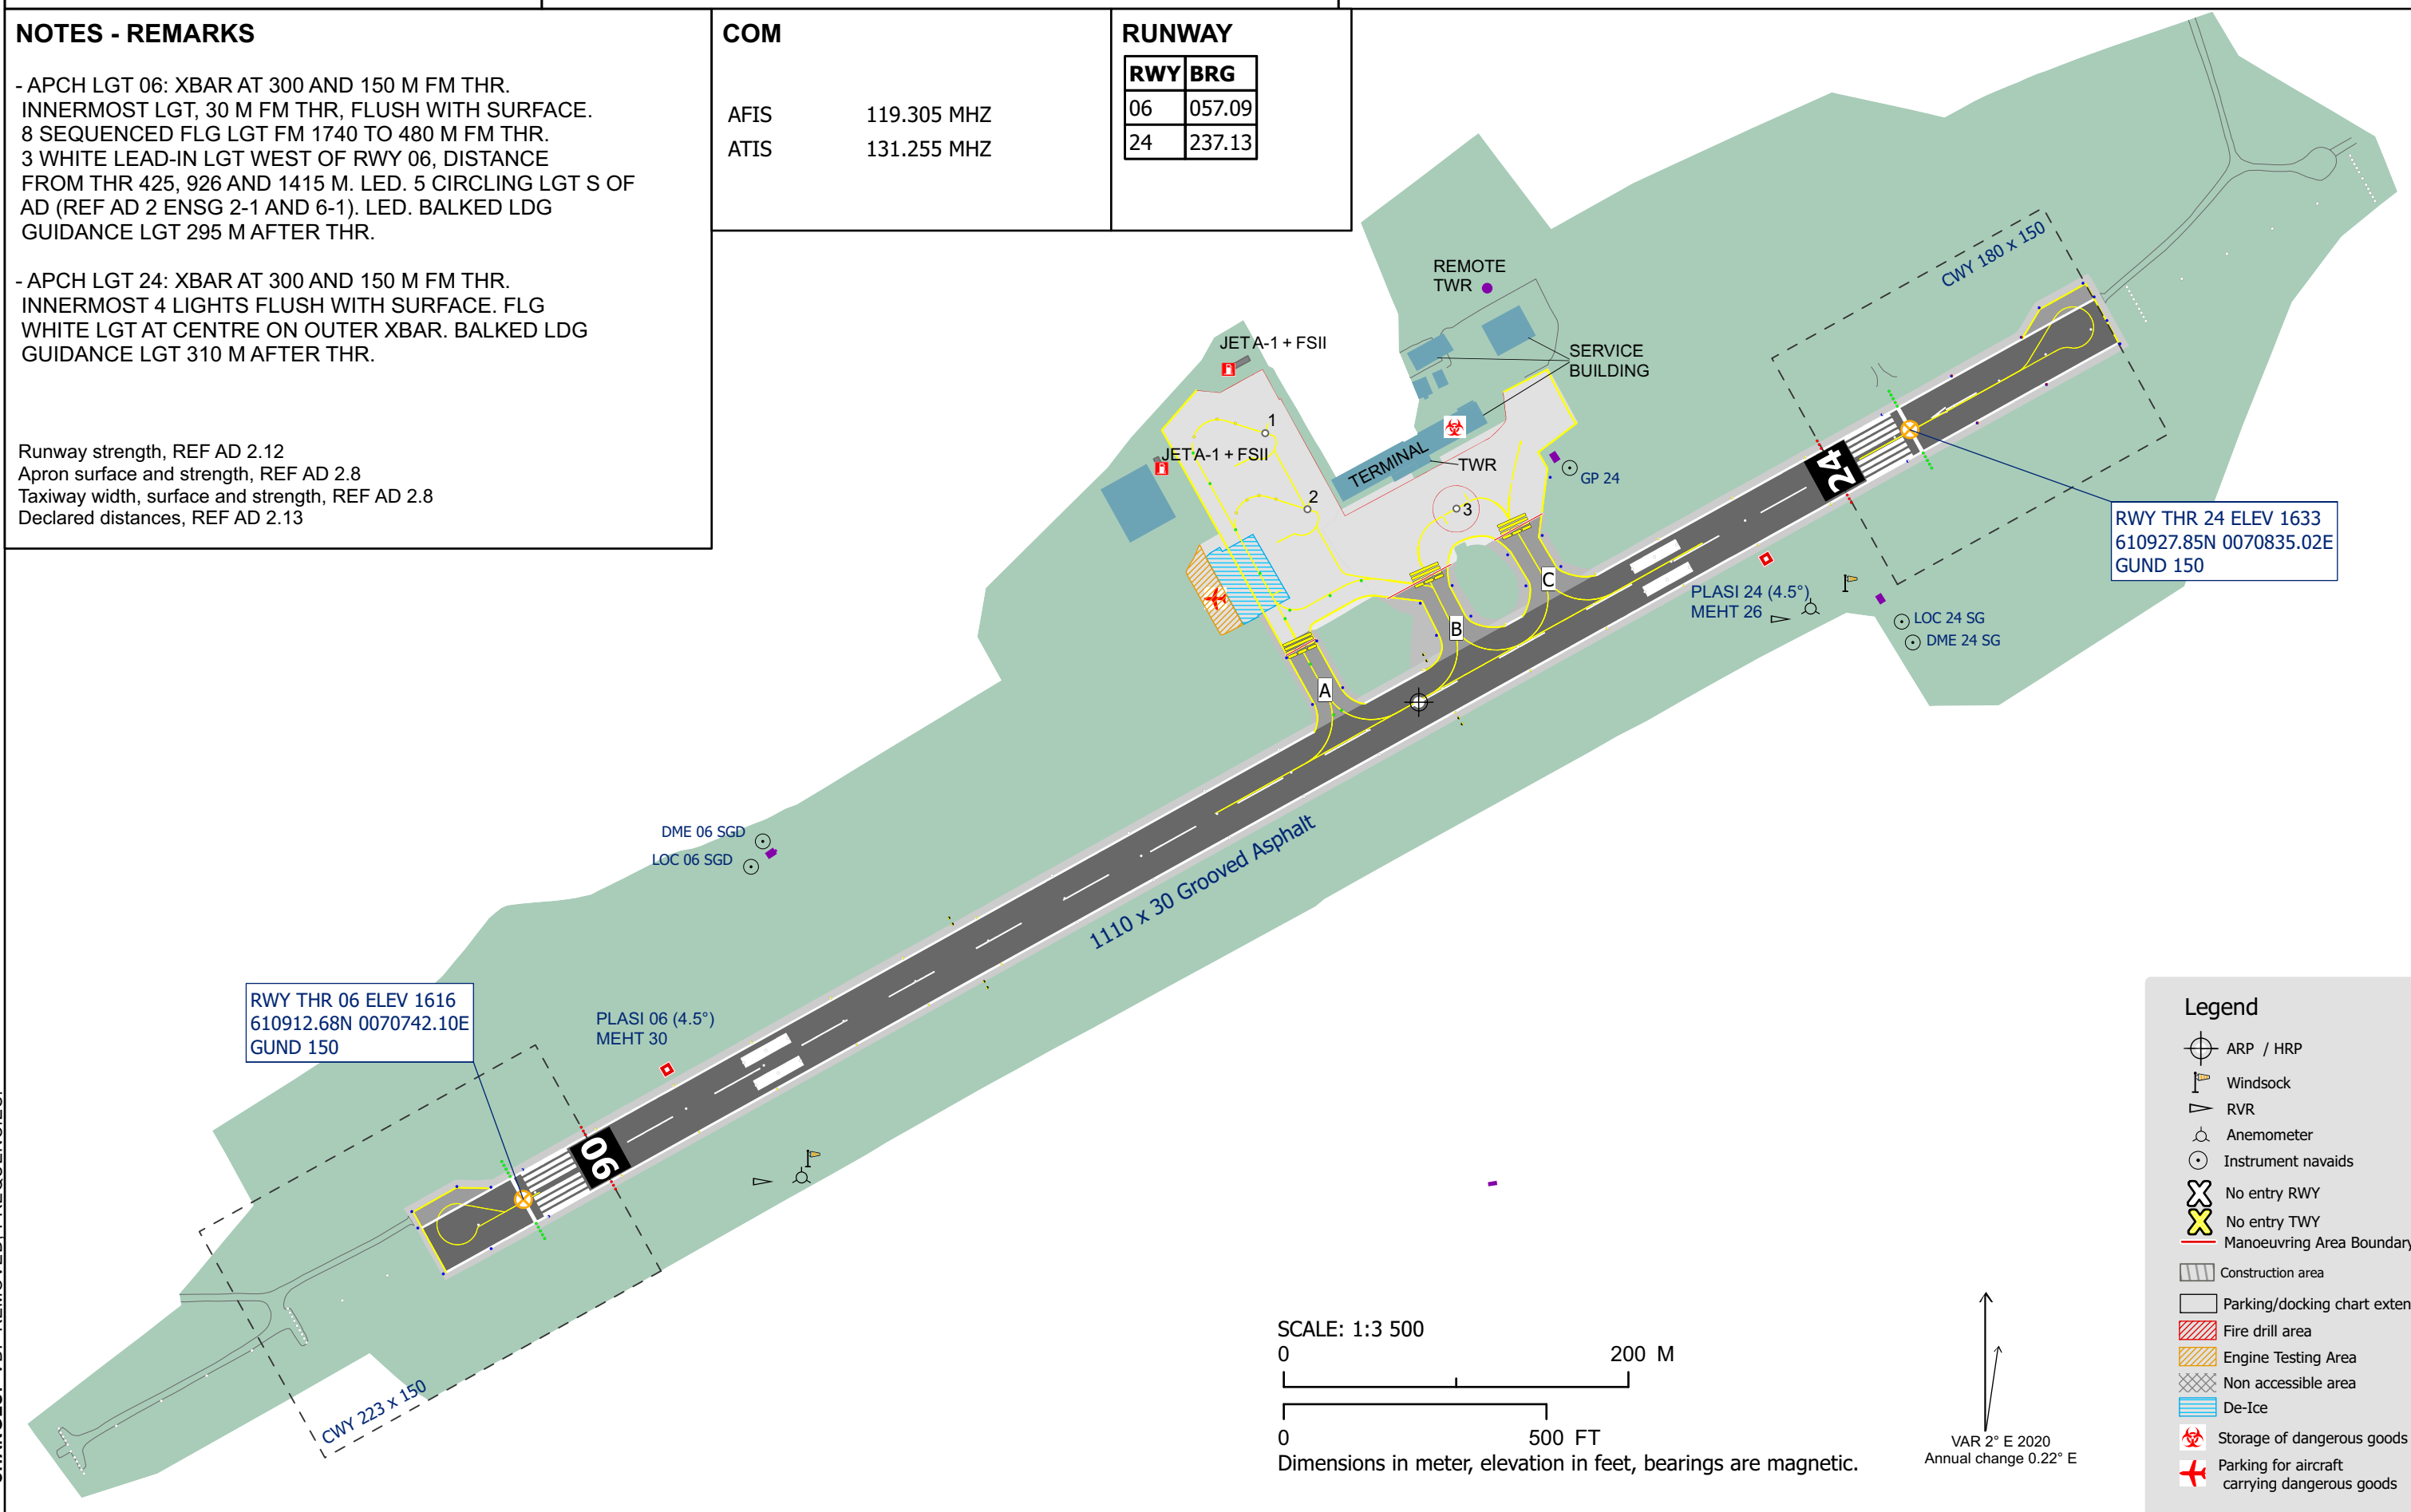

CHANGES: VDF REMOVED, FREQUENCIES.