

AERODROME CHART
ICAO

ARP 642820N 0113443E
AD ELEV 8

NAMSOS, NAMSOS
NORWAY

NOTES - REMARKS

- APCH RWY 07: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR AT 300 AND 150 M. FLASHING WHITE LGT ON CENTRE OF OUTER XBAR.
BALKED LDG GUIDANCE LGT LOCATED 280 M AFTER THR.

- APCH RWY 25: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR AT 150 M. FLASHING WHITE LGT AT 180 M. SEQUENCED FLASHING LGT
FM 4980 TO 1320 M FM THR. NOTE: THE FOURTH GROUP OF THESE LIGHTS IS
LOCATED OFFSET 60 M TO THE SOUTH OF THE EXTENDED RWY CL.
BALKED LDG GUIDANCE LGT LOCATED 280 M AFTER THR.

Runway strength, REF AD 2.12
Apron surface and strength, REF AD 2.8
Taxiway width, surface and strength, REF AD 2.8
Declared distances, REF AD 2.13


COM

AFIS119.905 MHZ

ATIS133.205 MHZ

RUNWAY

RWY	BRG
07	070.04
25	250.06

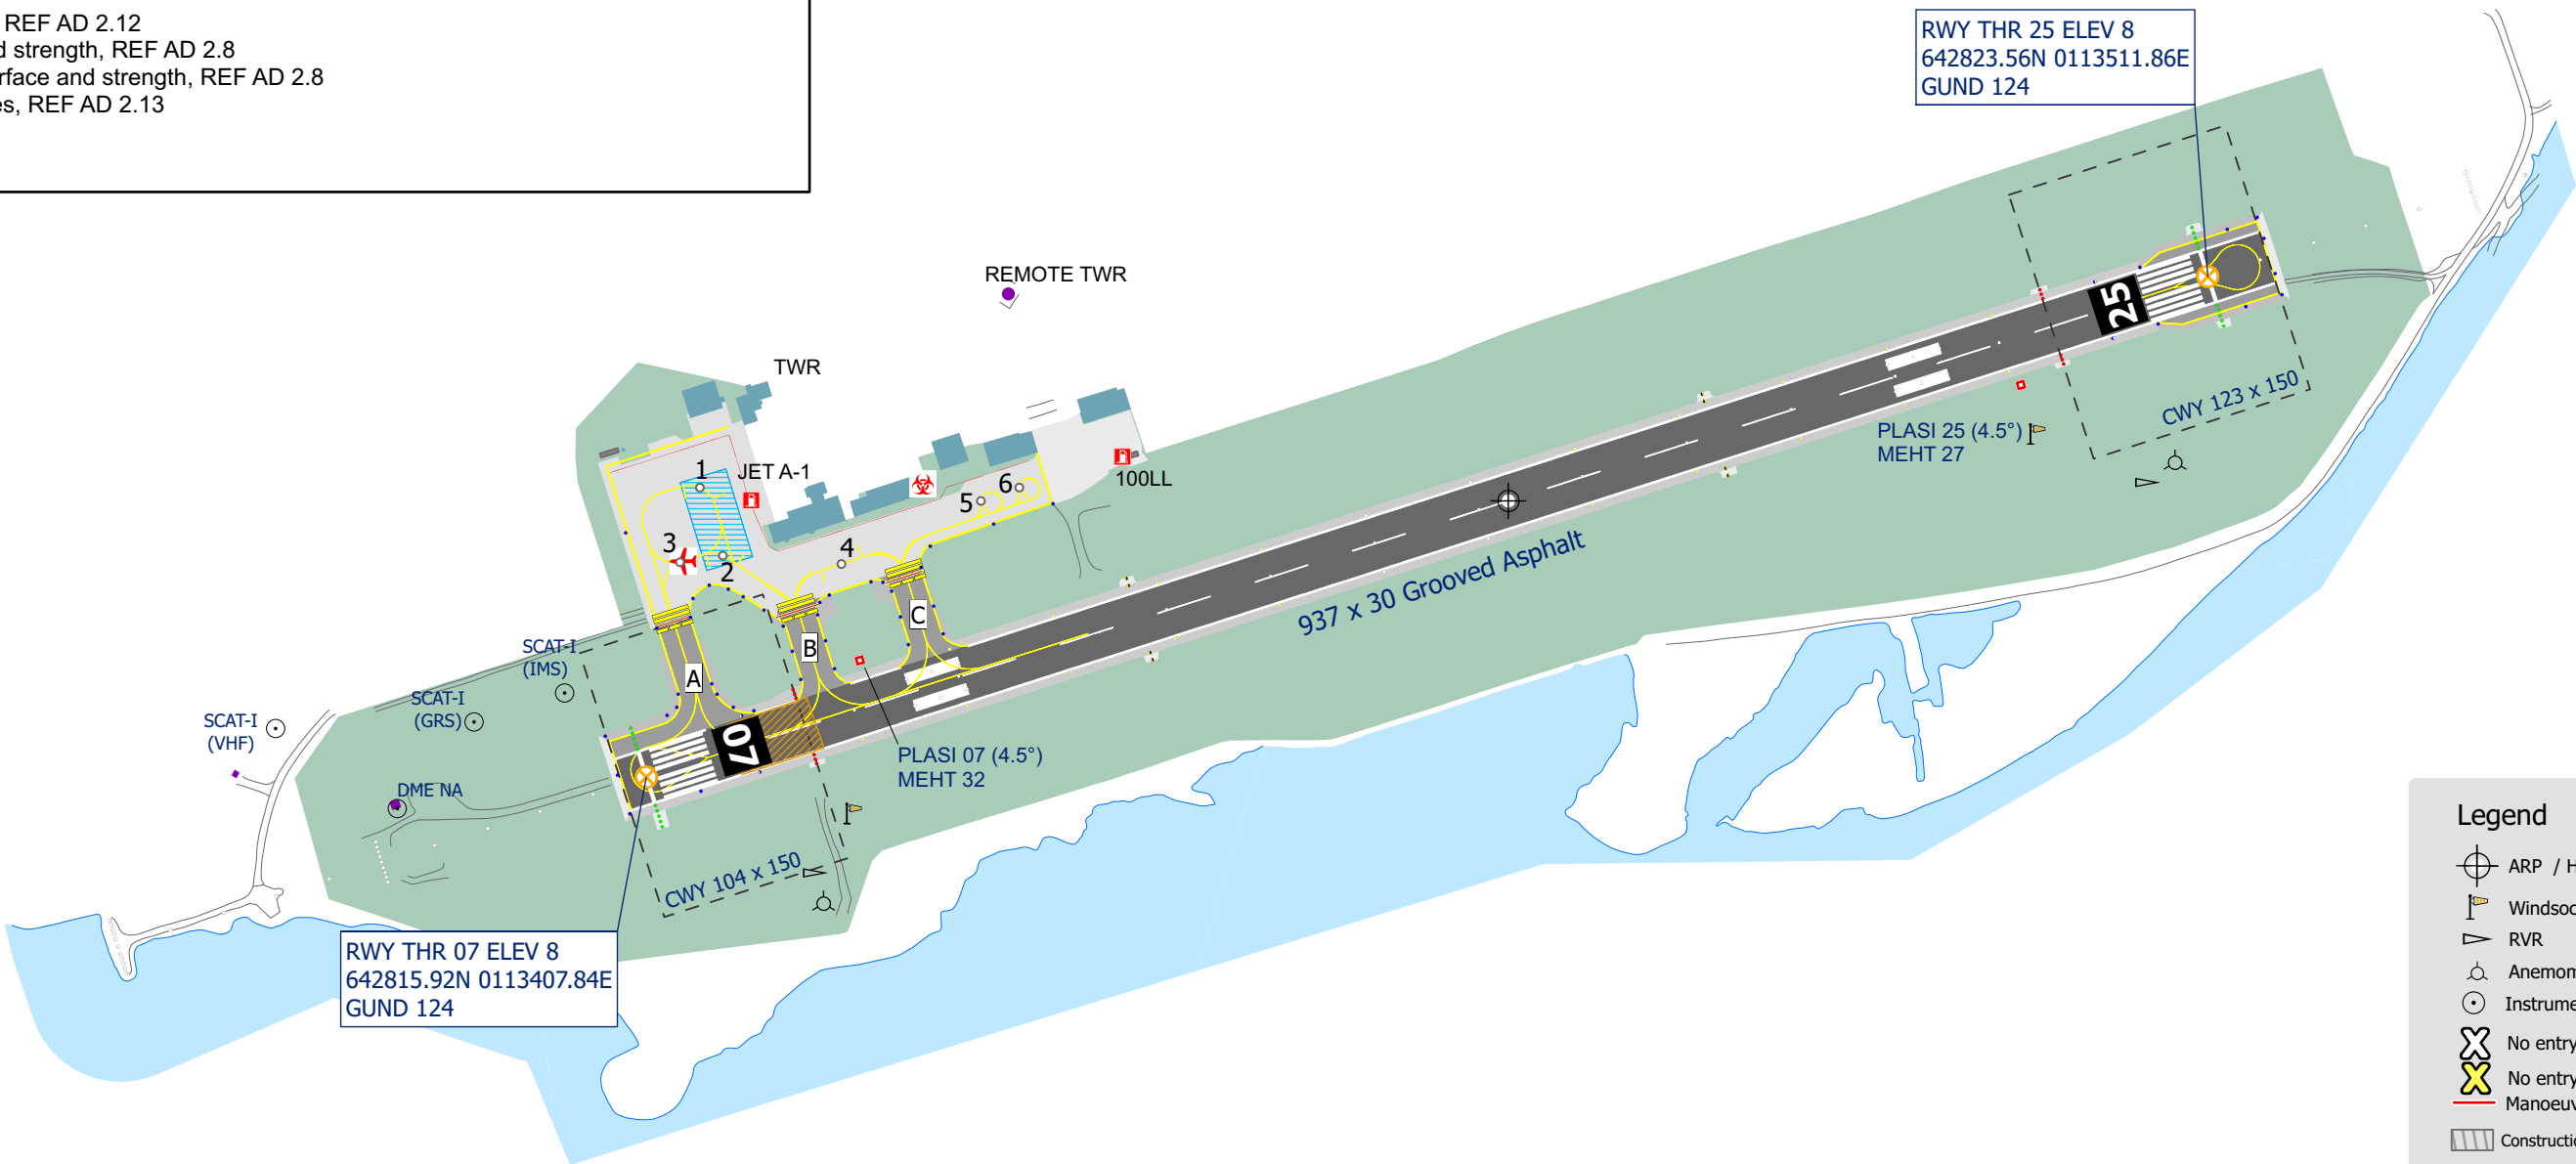

CHANGES: FREQUENCIES.