

AERODROME CHART

ICAO

ARP 612328N 0054525E
AD ELEV 1045

**FØRDE, BRINGELAND
NORWAY**

NOTES - REMARKS

- APCH LGT RWY 07: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR 11 LGT AT 300 M AND 9 LGT 150 M FM THR. SEQUENCED FLG WHITE APCH LGT BTN 1259 AND 239 M FM THR. BALKED LDG GUIDANCE LGT 285 M AFTER THR.

- APCH LGT RWY 25: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR 9 LGT 94 M FM THR, 1 LGT 62 M AND 1 LGT 31 M FM THR.
REDUCED APCH LGT SYSTEM. SEQUENCED FLASHING
LGT BTN 2140 AND 94 M FM THR. BALKED LDG GUIDANCE LGT
285 M AFTER THR.

- PLASI RWY 25: NOT TO BE USED OUTSIDE DME 2.3 FD.

Runway strength, REF AD 2.12

Apron surface and strength, REF AD 2.8

Taxiway width, surface and strength, REF AD 2.8


Declared distances, REF AD 2.13

COM

AFIS	118.455 MHZ
ATIS	131.155 MHZ

RUNWAY

RWY	BRG
07	072.23
25	252.25

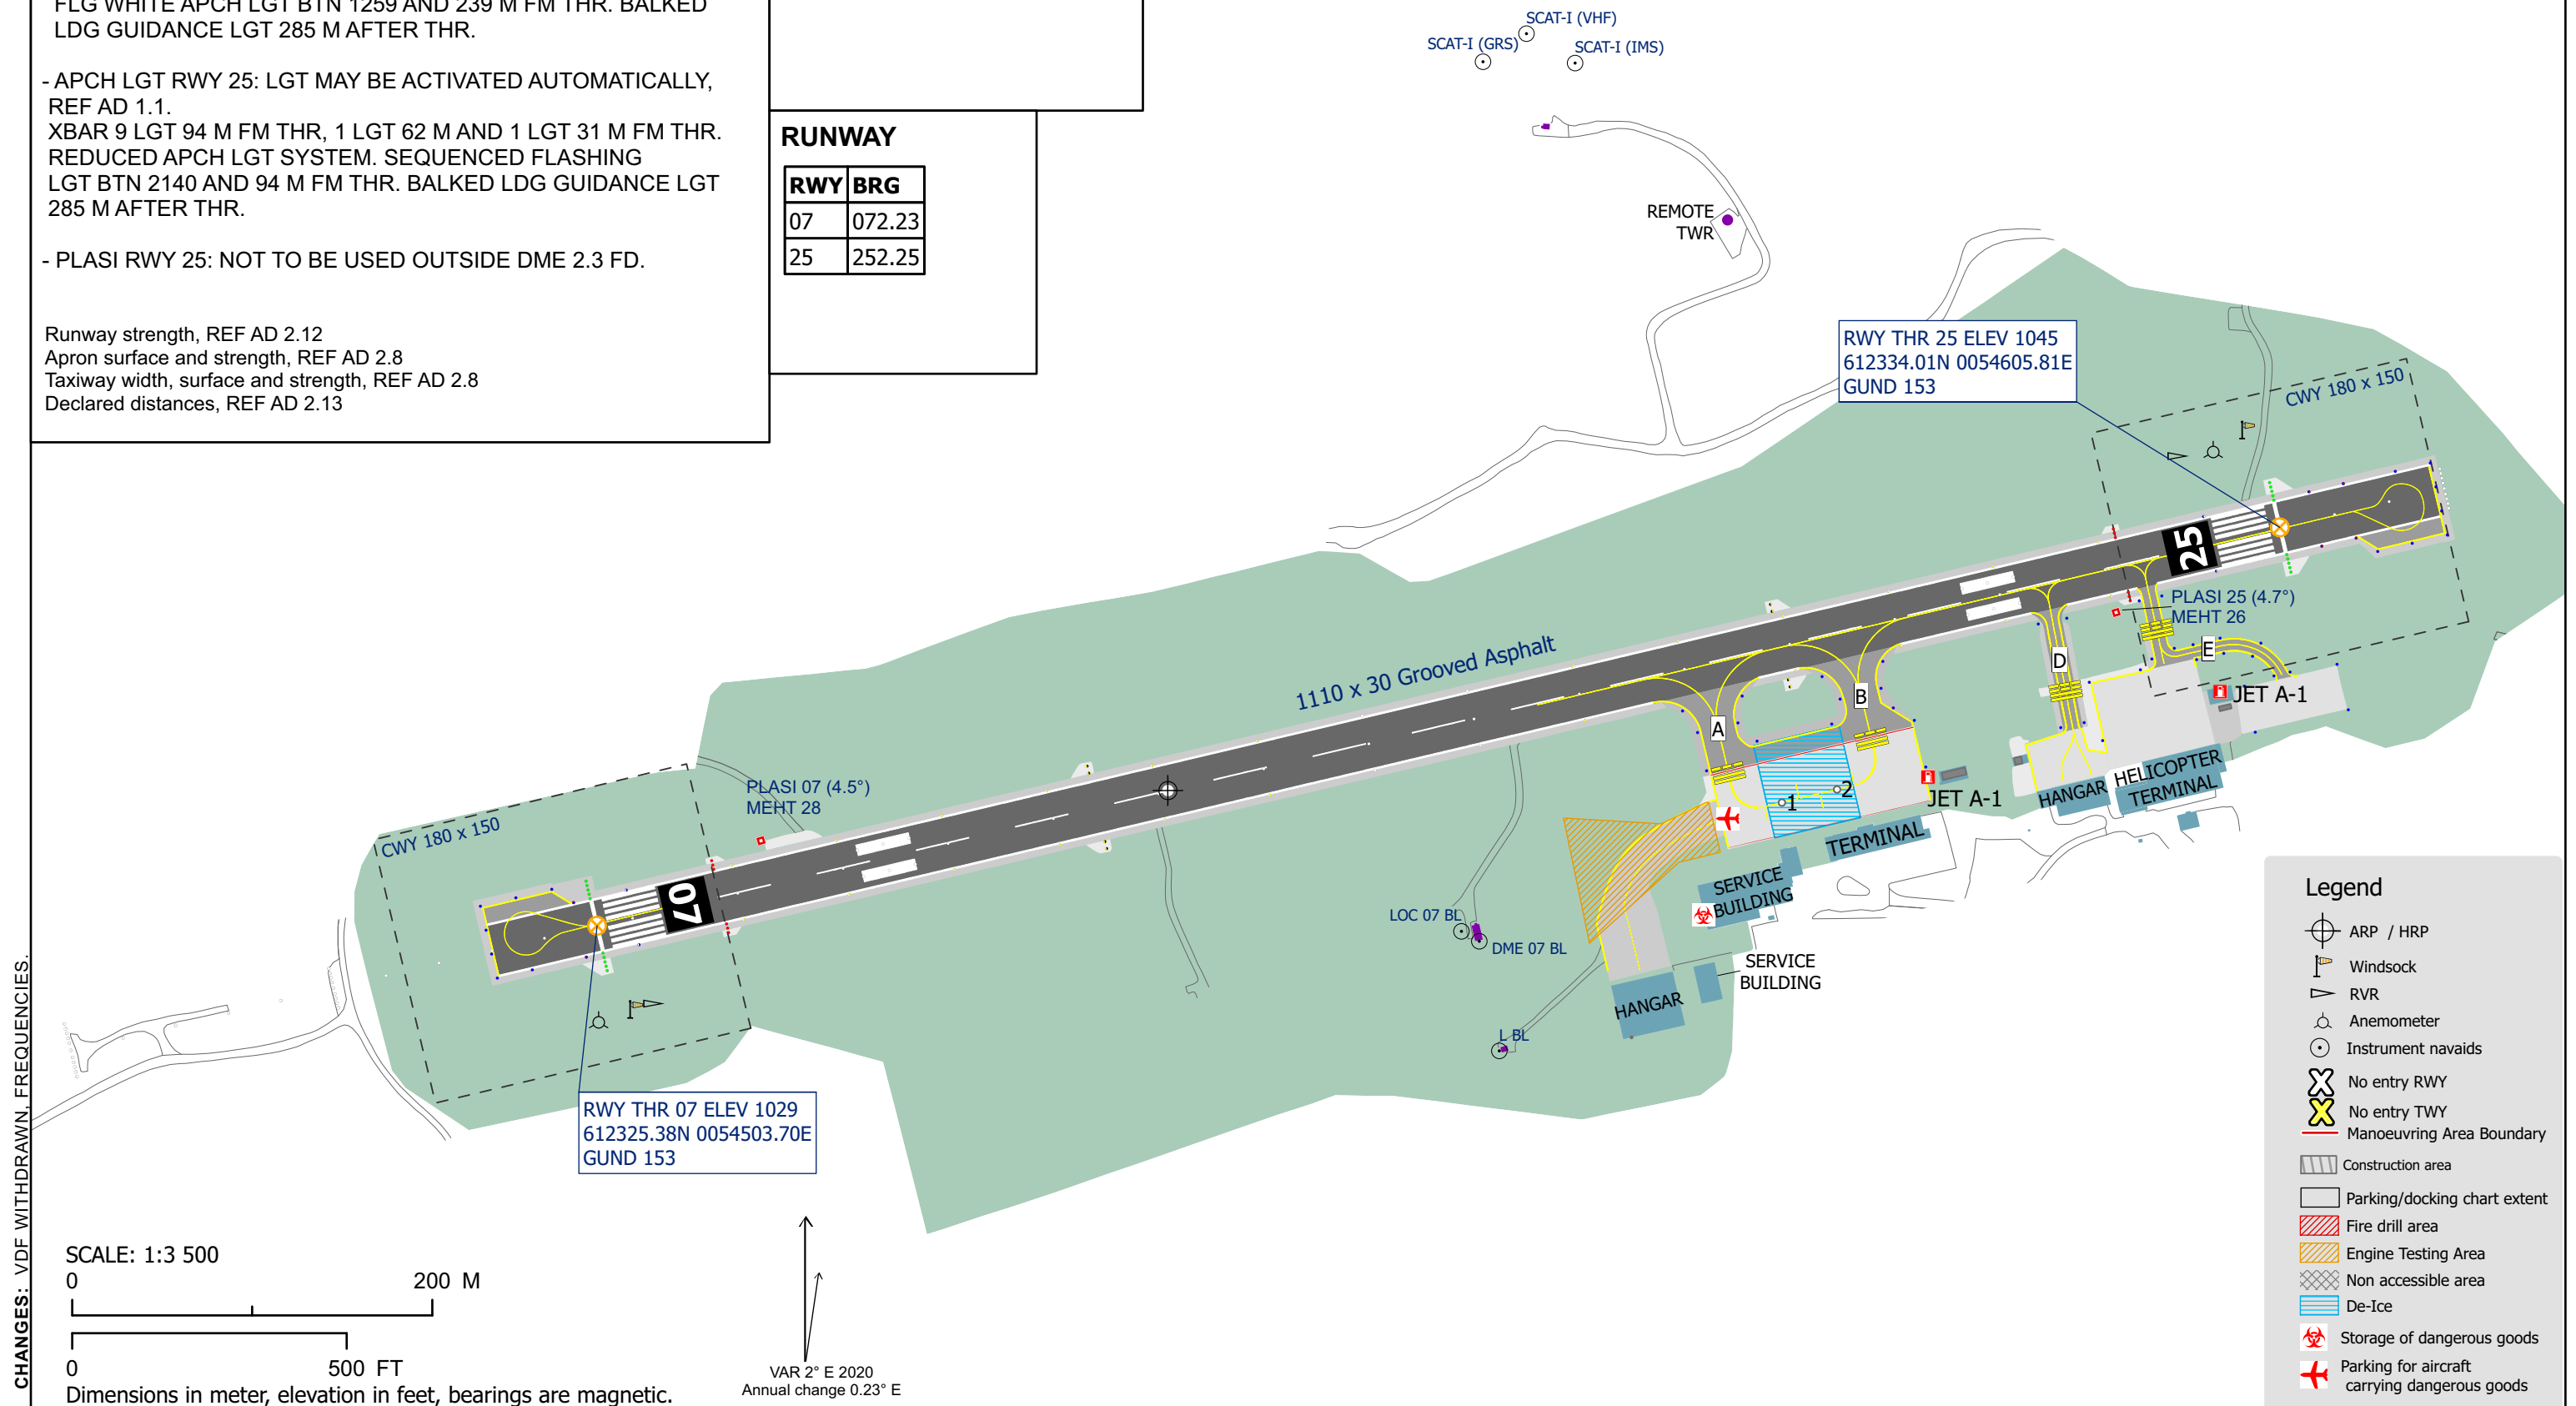

CHANGES: VDF WITHDRAWN, FREQUENCIES.

SCALE: 1:3 500

0 200 M

0 500 FT

Dimensions in meter, elevation in feet, bearings are magnetic.

VAR 2° E 2020
Annual change 0.23° E

Legend

