

AERODROME CHART

ICAO

ARP 705217N 0290203E

AD ELEV 43

BERLEVÅG, BERLEVÅG

NORWAY

NOTES - REMARKS

- APCH LGT RWY 06: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR AT 300 AND 150 M. INNERMOST LGT, 30 M FM THR, FLUSH. SEQUENCED FLG LGT ON CL 1500 M. 4 CIRCLING LGT, OUTERMOST LGT WI DEP SECTOR RWY 24. BALKED LDG GUIDANCE LGT 290 M AFTER THR.

- APCH LGT RWY 24: LGT MAY BE ACTIVATED AUTOMATICALLY, REF AD 1.1.
XBAR AT 300 AND 150 M. INNERMOST LGT FLUSH, 30 M FM THR. 1 CIRCLING LGT. BALKED LDG GUIDANCE LGT LOCATED 290 M AFTER THR.

Runway strength, REF AD 2.12
Apron surface and strength, REF AD 2.8
Taxiway width, surface and strength, REF AD 2.8
Declared distances, REF AD 2.13

RUNWAY

RWY	BRG
06	059.06
24	239.09


COM

AFIS

120.105 MHZ

ATIS

132.680 MHZ

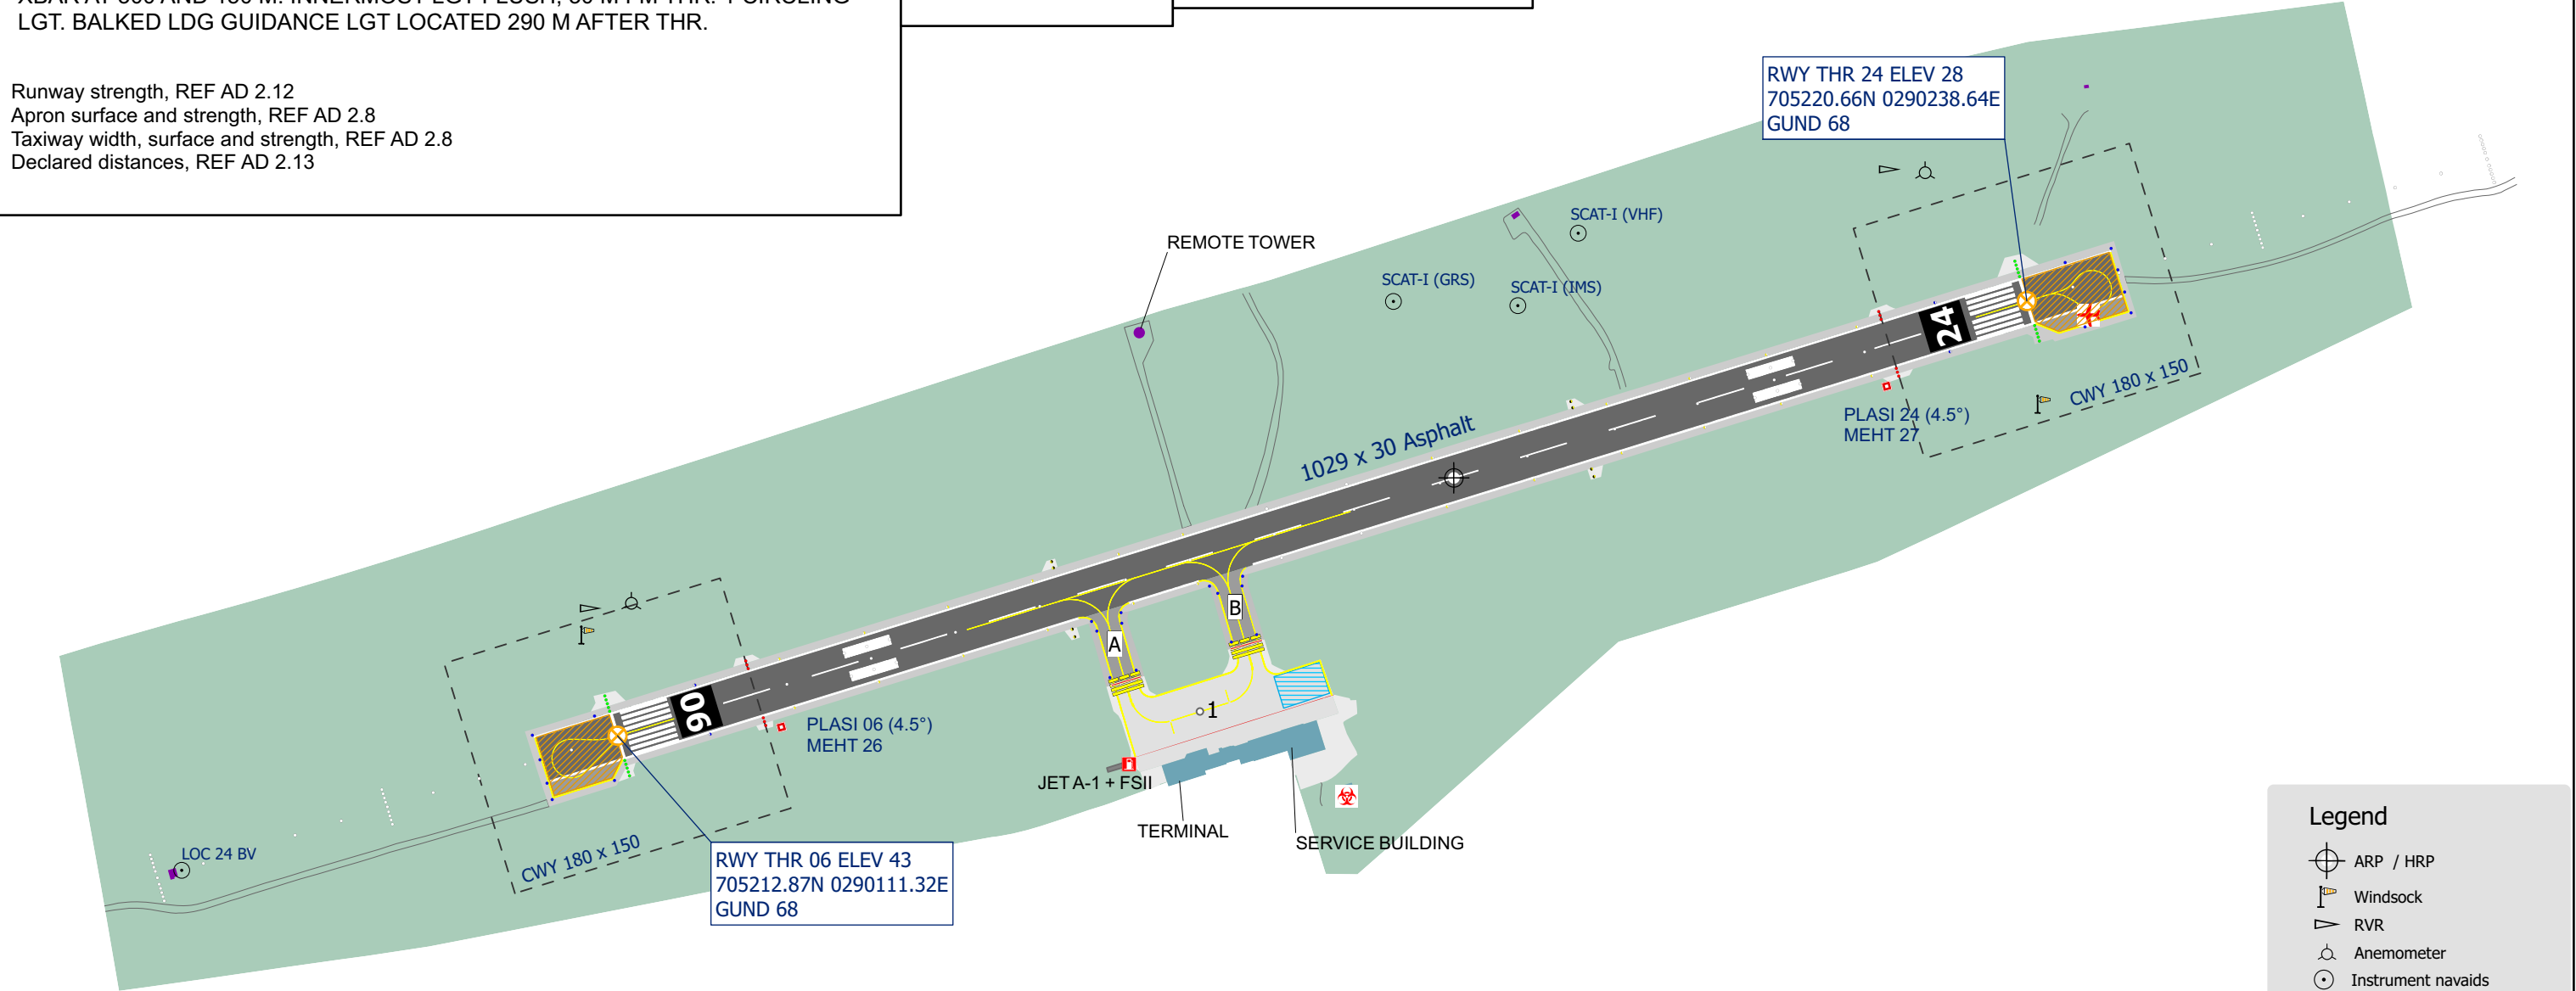

CHANGES: FREQUENCIES.