AIRCRAFT PARKING/ DOCKING CHART

APRON ELEV 36

BODØ, BODØ
NORWAY

NOTES - REMARKS


ACFT STANDS 14, 17 AND 18 SAFEGATE EQUIPPED.
FOR START-UP AND CLR CONTACT TWR 118.105 MHZ.

HELI OPS AREAS, FOR DETAILS SEE AD 2.16

Runway strength, REF AD 2.12
Apron surface and strength, REF AD 2.8
Taxiway width, surface and strength, REF AD 2.8
Declared distances, REF AD 2.13

COM

ATIS	123.905 MHZ
DEICE	121.955 MHZ
DEICE	131.755 MHZ
TWR	398.650 MHZ
TWR	118.105 MHZ

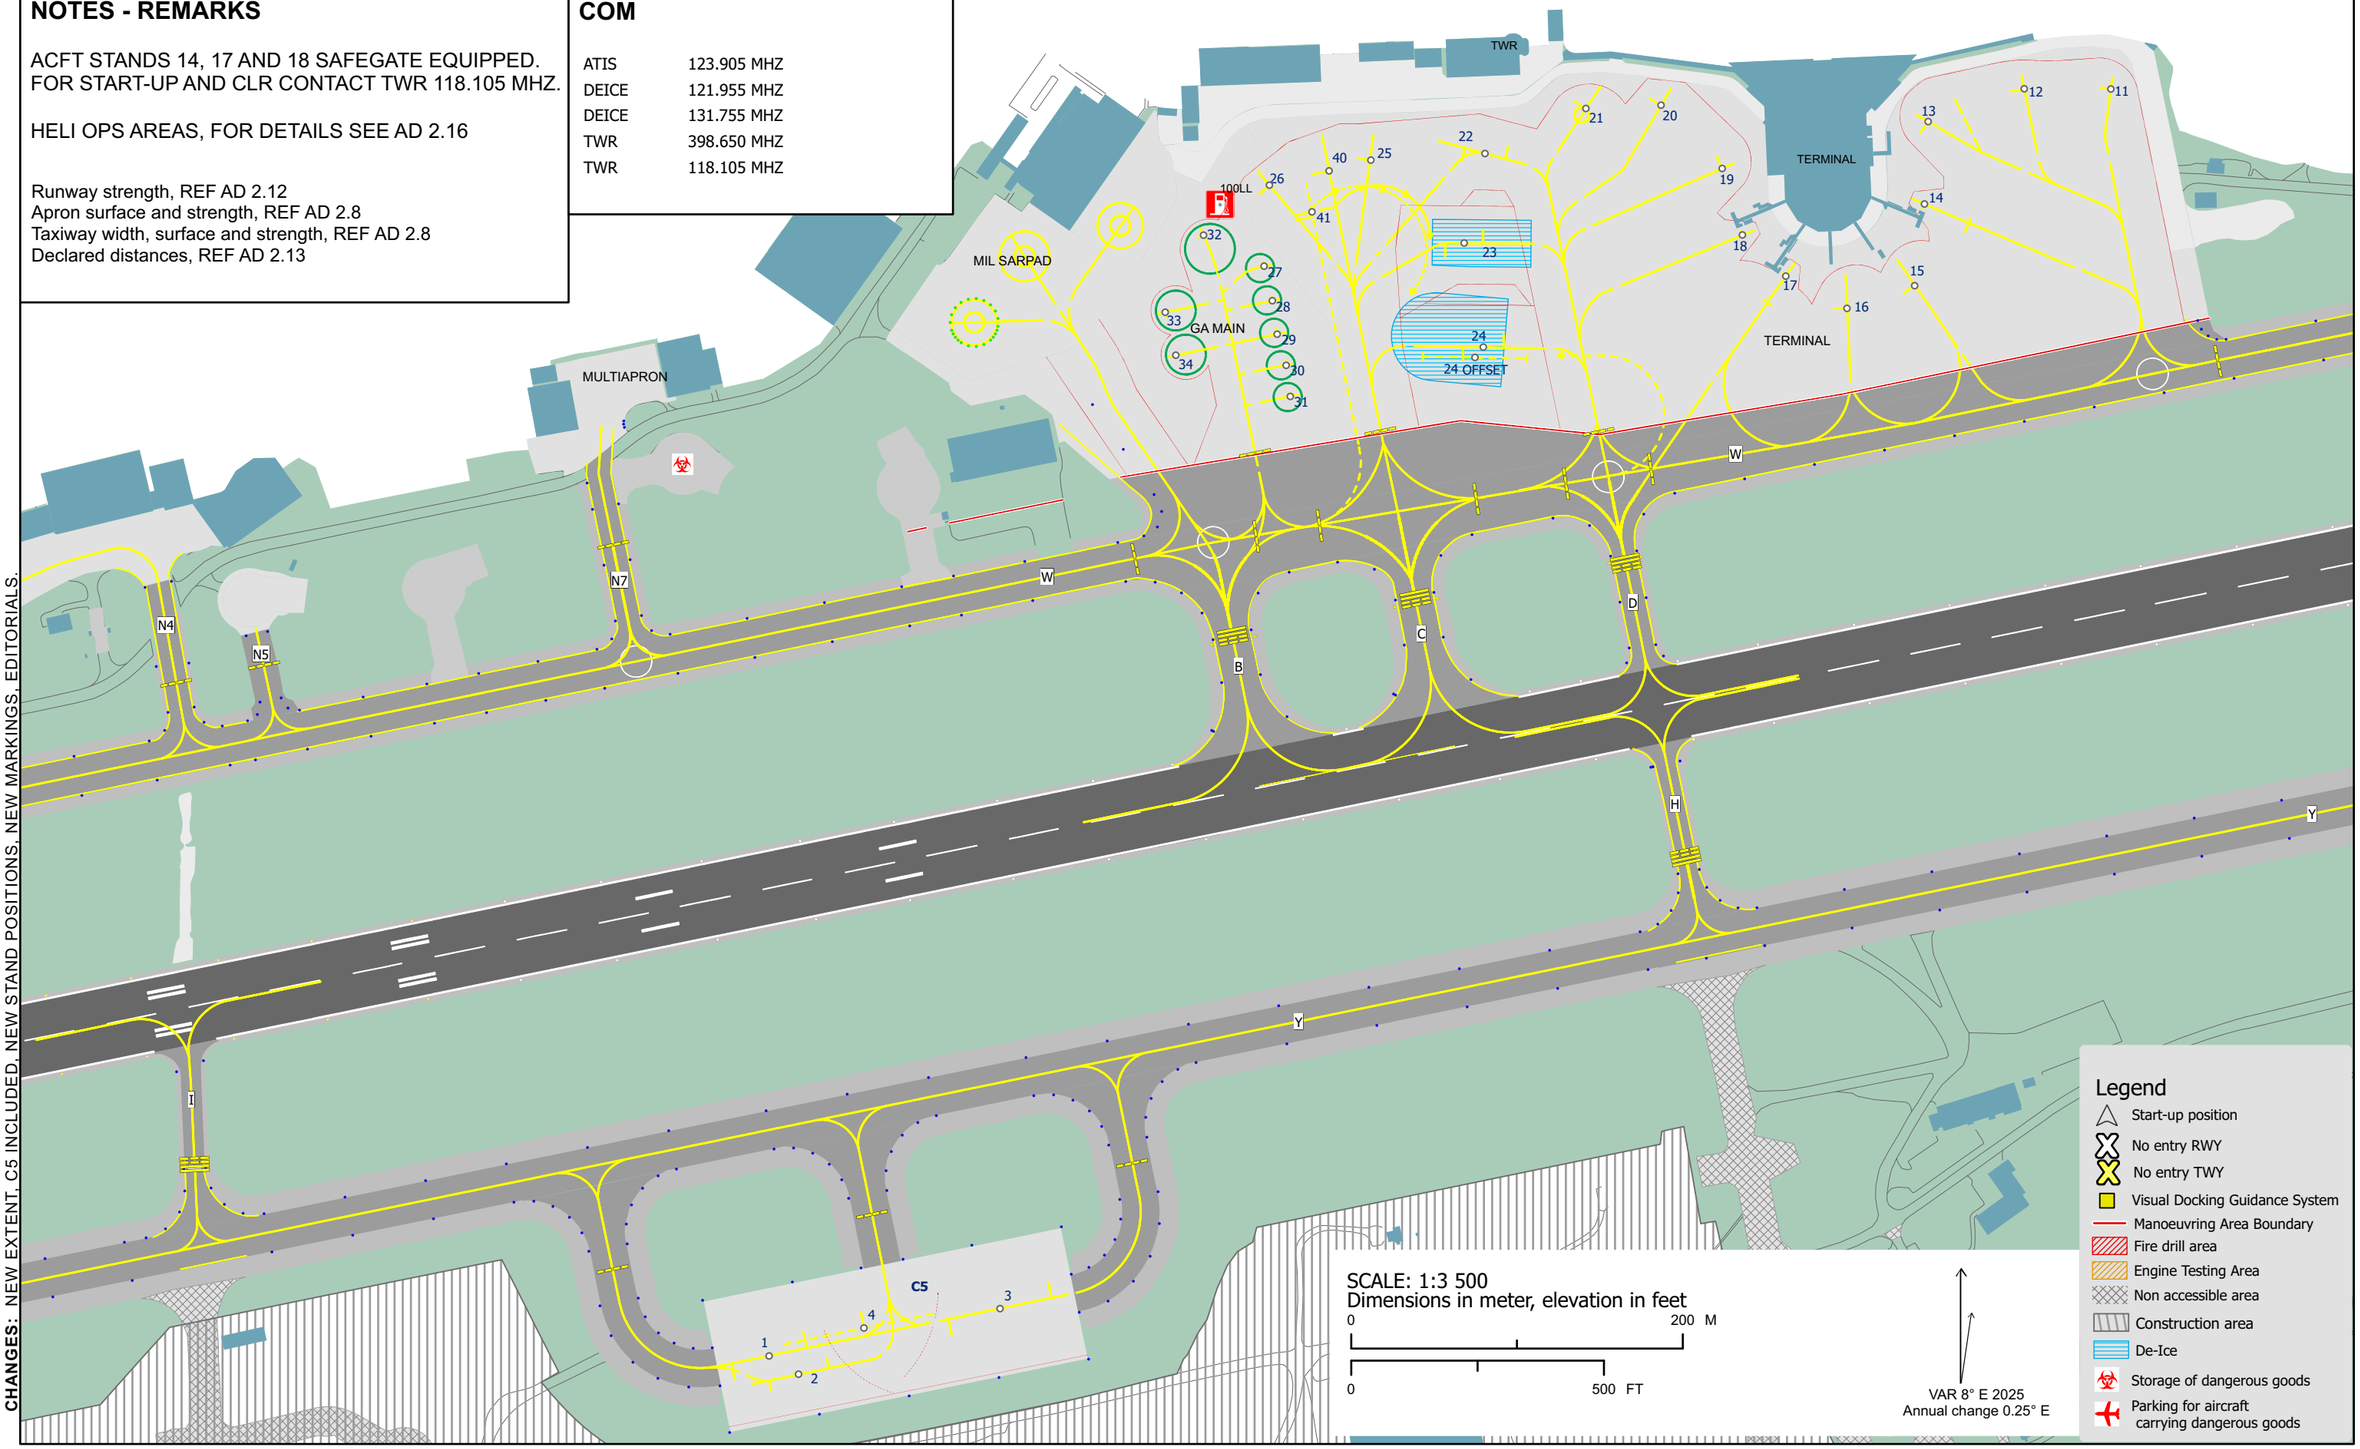

CHANGES: NEW EXTENT, C5 INCLUDED, NEW STAND POSITIONS, NEW MARKINGS, EDITORIALS.