

AERODROME CHART

ICAO

ARP 655735N 0122820E
AD ELEV 58

**SANDNESSJØEN, STOKKA
NORWAY**

NOTES - REMARKS

- APCH LGT RWY 02: XBAR AT 300 AND 150 M. APCH CL LGT AT INTERVALS OF 30 M. INNERMOST LGT 30 M FM THR AND FLUSH WITH SURFACE. OUTER XBAR AND APCH CL LGT ALSO LIL. FLASHING WHITE LGT AT CENTRE OF OUTER XBAR. BALKED LDG GUIDANCE LGT 322 M AFTER THR. AIMING POINT LGT AT 189, 174 AND 159 M AFTER THR.

- APCH LGT RWY 20: XBAR AT 300 AND 150 M. APCH CL LGT AT INTERVALS OF 30 M. INNERMOST LGT 30 M FM THR AND FLUSH WITH SURFACE. OUTER XBAR AND APCH CL LGT ALSO LIL. FLASHING WHITE LGT AT CENTRE OF OUTER LGT ON 420 M, 1 YELLOW FIXED LEAD-IN LGT 550 M FM THR AND 2 GROUPS OF 3 WHITE SEQUENCED LEAD-IN LGT 600 AND 1100 M FM THR. BALKED LDG GUIDANCE LGT 323 M AFTER THR. AIMING POINT LGT AT 232, 217 AND 202 M AFTER THR.

Runway strength, REF AD 2.12

Apron surface and strength, REF AD 2.8

Taxiway width, surface and strength, REF AD 2.8

Declared distances, REF AD 2.13

COM


AFIS 120.305 MHZ

AFIS 121.905 MHZ

ATIS 136.455 MHZ

RUNWAY

RWY	BRG
02	019.68
20	199.69

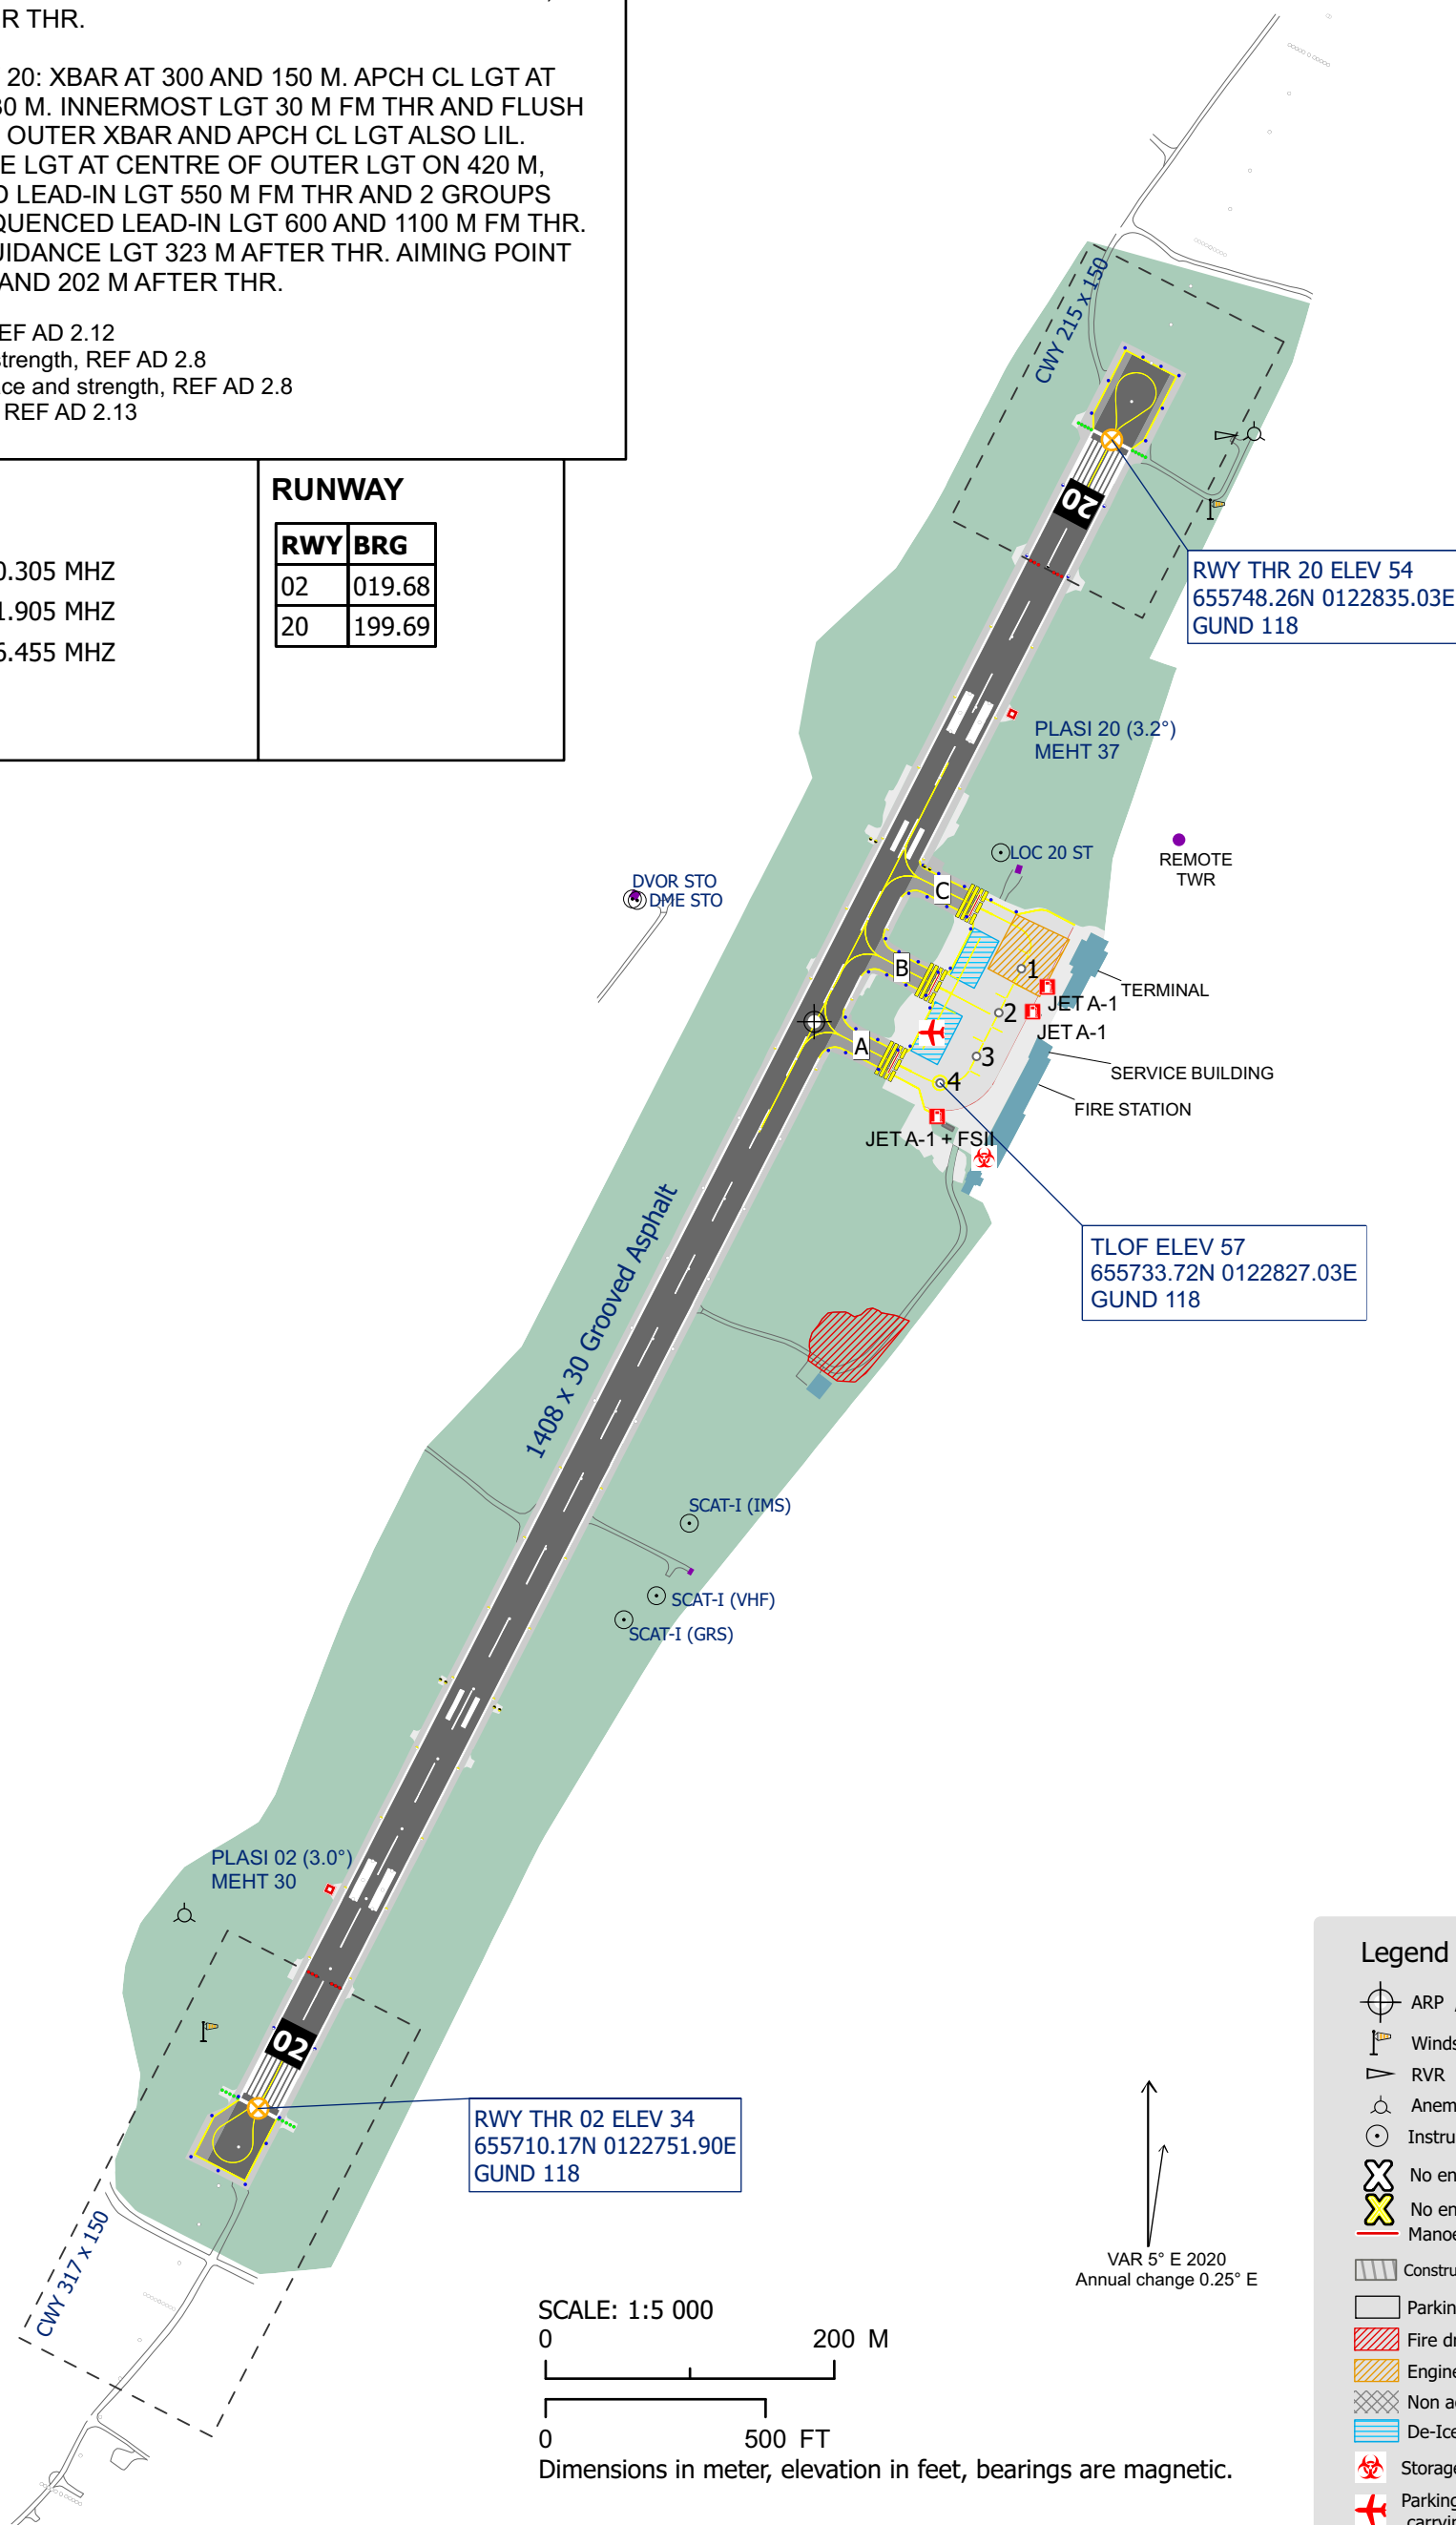

CHANGES: REMOTE TWR, VDF REMOVED, FREQUENCIES, EDITORIALS.