

INSTRUMENT APPROACH CHART - ICAO

6₃

MSA 25 NM ARP

ATIS: 136.355

AFIS: 120.405

AD ELEV: 2054

THR ELEV: 2051

HGT RELATED TO THR 31

CIRCLING HGT RELATED TO AD ELEV

DIST IN NM. ELEV, ALT AND HGT IN FT

SCALE 1:300 000


VAR 4° E (2020)

RØROS

RØROS

ILS Z or LOC Z RWY 31

TRANSITION ALTITUDE 7000

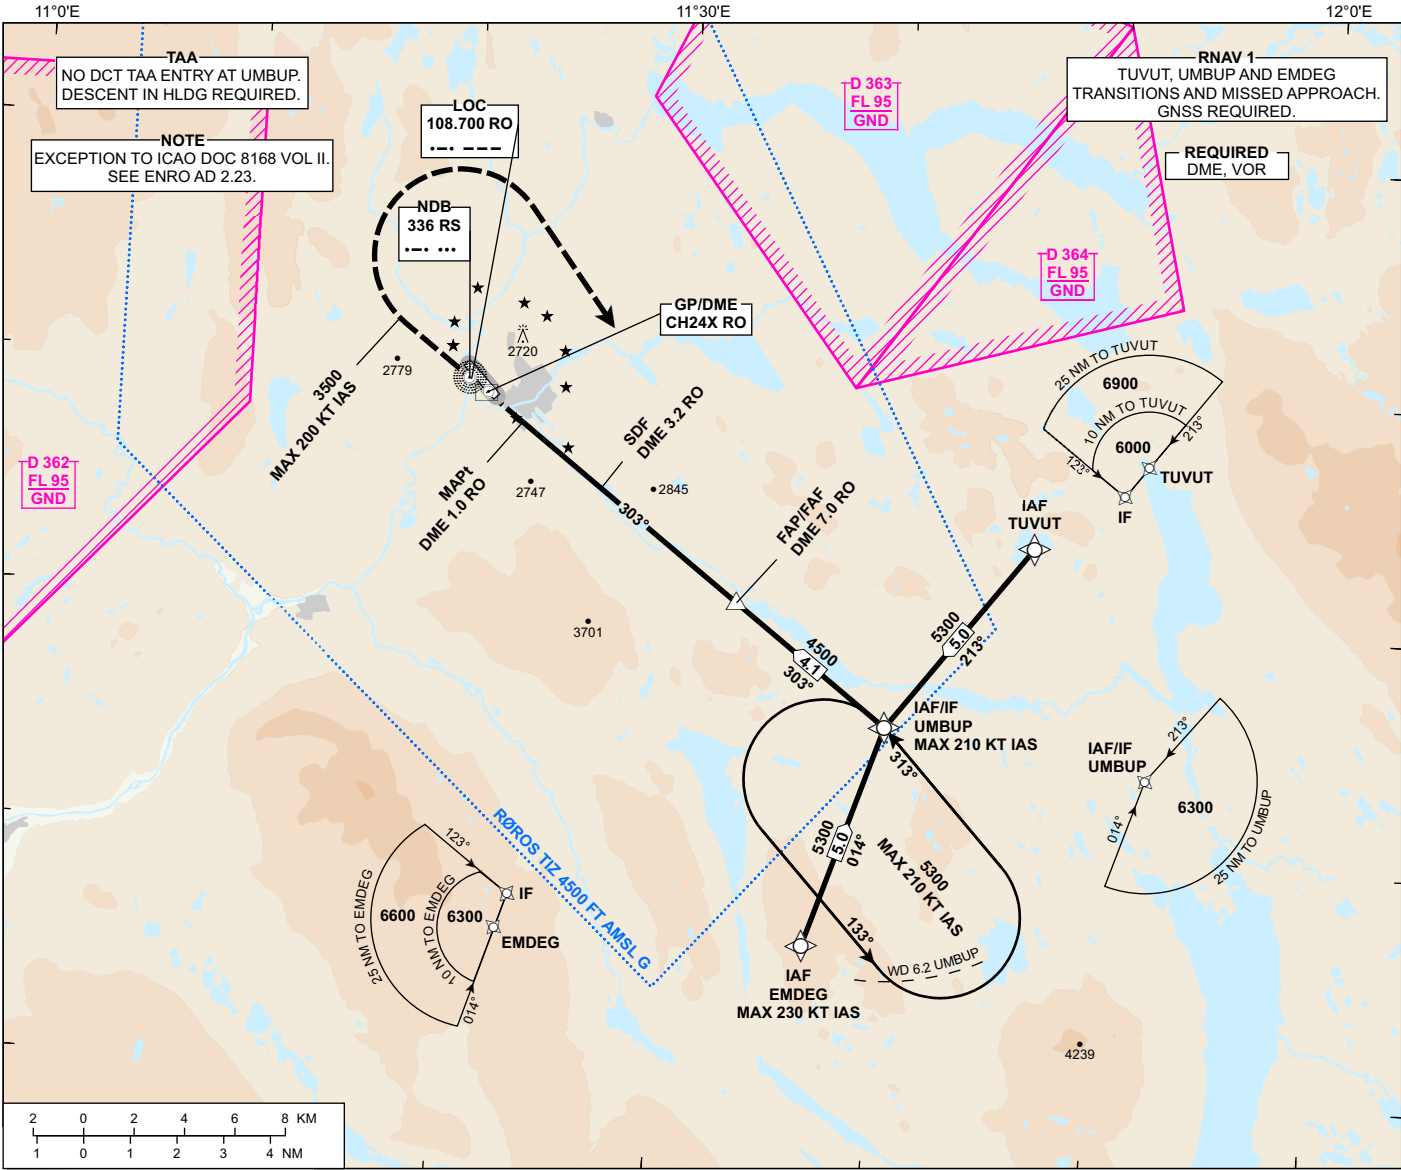

DIST TO RO	9	8	7	6	5	4	3	2
ALT (HGT)	-	-	4470 (2419)	4120 (2069)	3770 (1719)	3420 (1369)	3080 (1029)	2730 (679)

PROCEDURE OFFSET: 9°

MISSED APCH:
CLIMB STRAIGHT AHEAD TO 3500. TURN RIGHT DCT UMBUP. ENTER UMBUP HLDG CLIMBING TO 5300.

NOTE:
INITIAL MISSED APCH
TURN LIMITED TO
MAX 200 KT IAS.

NOTE:
NO TURN BEFORE MAPt.

ILS RDH 64



CAT OF ACFT		A	B	C	D
OCA (H) STRAIGHT- IN	CAT I	2554 (503)	2568 (517)	2578 (527)	-
	LOC	-	2680 (629)	-	-
CIRCLING		3020 (966)	3220 (1166)	3500 (1446)	-

NOTE: CIRCLING N OF AD ONLY.

CHANGES: FREQUENCIES.

ATS AIRSPACE CLASSIFICATION: REF ENR 1.4